Hybrid Pro 10FT Modular Backwall Kit 27

HP-K-27
Hybrid Pro™ Modular Kit 27 is a minimal, yet sophisticated modular exhibit that features a seamless fabric backwall with three shelves for small product display. Experience how less is more with this simple and sophisticated modular display.



Hybrid pro counter is optional
not included at base price

features and benefits:

"- Silver aluminum extrusion frame (1)
- SEG push-fit fabric graphics (1)
- Three shelves for small product display; each shelf holds max 15lbs
- Shelf color options: Silver, Black, Mahogany, Natural
- Ships freight in a protective plastic freight case
- Foreground counter not included"
- Lifetime hardware warranty against manufacturer defects

dimensions:

Hardware	Graphic
Assembled unit: 221.19"w x 95.45"h x 68.92"d 5618.23mm(w) x 2424.43mm(h) x 1750.57mm(d) Approximate weight: 428 lbs / 194.14kg	Refer to related graphic template for more information. Visit: www.exhibitors-handbook.com/graphic-templates
Shipping	**additional information:**
Packing case(s): OFC Shipping dimensions: 49"l x 39"h x 15"d 1245mm(l) x 1991mm(h) x 381mm(d) Approximate total shipping weight: 543.65 lbs / 246.6 kg	Graphic material: Dye-sublimation zipper pillowcase fabric Dye-sublimation SEG push-fit fabric When included in a larger kit, a different packaging solution will be listed to accommodate all contents of the kit. Individual packaging no longer provided. Panel Colors: grey, black, white Tabletop Colors: silver, black, mahogany, natural 3 person assembly recommended:

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

FABRIC, VINYL & UV GRAPHIC
CARE GUIDELINES

GENERAL HANDLING FABRIC GRAPHICS

- Your fabric graphics should always be handled in a clean, dry area with clean hands. When possible, use white fabric gloves.
- Be sure fabric is clean and dry before packing.
- Machine washing and/or drying is not recommended for all fabrics. Refer to chart below for which fabrics are washable.

EMERGENCY STAIN TREATMENT (FABRIC)

1. For dry stains, like loose dirt or pencil marks, try initially using masking tape or Magic Eraser (dry-not moistened).
   - Masking tape or MagicEraser (dry) can be quite effective at lifting dry, surface dirt. Try 'pulling' as much of stain away as you can. Avoid rubbing stain into fabric.
2. Introduce water or liquid cleaner for stains not responsive to masking tape or dry Magic Eraser.
   - When using liquids to treat stains, if at all possible, treat the stain with fabric off of the frame.
   - Place a clean dry cloth behind stain (to absorb stain while being treated). Moisten another cloth initially with just water (distilled water is optimal, if available).
   - Gently blot stain with moistened cloth (or small area of moistened Magic Eraser), while trying to push stain through to the back, using the dry cloth to absorb.
   - Repeat using care to keep the wet area as small as possible.
3. Grandma's Secret Spot Remover can be an effective stain remover. Mix several drops in a small cup with clean water. Repeat above technique, taking care to keep wet area as small as possible and using dry cloth on back of stain to absorb.

MACHINE WASHING FABRIC GRAPHICS

- Cold water/delicate cycle/tumble dry low or air dry. For stretch fabrics do not use dryer, let hang dry.
- Use caution on dryer time with graphics containing liners. Its best to put tension fabric on frame when fabric is still damp and let it air dry. Always be sure that the aluminum frame is clean when mounting the damp graphic.
- Fabric stretch graphics that are washed and machine dried may shrink up to 3/4" per every 50" of fabric in the direction of the stretch and shrink up to 1/4" in the non stretch direction.

STORING & PACKING BACKLIT GRAPHICS

- To avoid cracks in the ink or having to steam graphics, Backlit fabrics should be loosely folded with bubble wrap or stored around a tube.
- Avoid folding the graphic tightly to store in a small bag or box.

GENERAL HANDLING VINYL & UV GRAPHICS


- Vinyl banners and rigid graphics should always be handled in a clean, dry area with clean hands. When possible, use white fabric gloves.
- Be sure vinyl/ UV is clean and dry before packing. Always follow material handling and packing instructions included.
- All vinyl materials should be rolled with graphics facing in to protect the graphic printed side. Roll on a tube if available.
- Avoid folding materials to reduce the risk of crease lines and chipped inks. If a graphic must be folded, try to fold loosely and as few times as possible.

EMERGENCY STAIN TREATMENT (UV)

- For drier stains, like loose dirt, pencil marks or adhesive, try initially using masking tape. Masking tape can be quite effective at lifting dry, surface dirt. Try 'pulling' as much of stain away as you can and avoid rubbing the stain into the material.
- When using Solvent to clean a stain be sure to avoid any image. Solvent is aggressive and will take the image off. Soapy water should be used at a ratio of 1 part Dawn® /10 parts water.
- While using Windex® avoid scrubbing harshly. Too much pressure can fade the graphic print.

GENERAL HANDLING OF ROLLABLE PVC PANELS

All mural panels, truss panels and detachables should be rolled with graphics facing out to protect the graphic printed side. Mural panels should be stored in the original plastic sleeves that are provided with the panels.

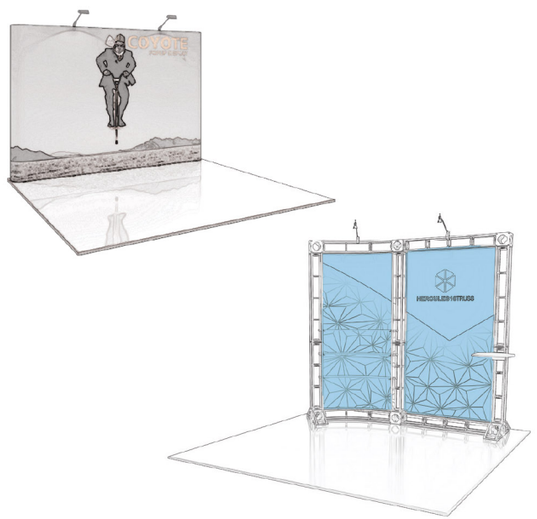

FABRIC, VINYL & UV GRAPHIC
CARE GUIDELINES


STEAMING FABRIC GRAPHICS

- For optimal results, steam wrinkles when fabric is tensioned and installed securely on the frame.
- Fill steamer with clean drinking water or distilled water. Avoid using water containing hard minerals.
- Hold steamer upright and hold close to fabric. Avoid touching fabric with steamer.
- Do not tip steamer as water drips may cause water marks to form on graphic.

NON BACKLIT FABRIC

* IF WRINKLES APPEAR

-STEAM FABRIC FROM THE FRONT SIDE OF THE FABRIC.

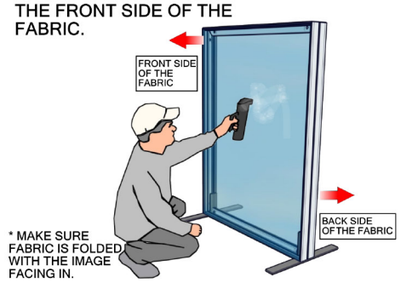

BACKLIT FABRIC

* IF WRINKLES APPEAR

1-STEAM FABRIC FROM THE BACK SIDE OF THE FABRIC WHEN POSSIBLE.

2-STEAM FABRIC FROM THE FRONT SIDE OF THE FABRIC.WHEN ACCESS TO BACK SIDE IS NOT AN OPTION



HANDLING REFERENCE CHART

FABRIC

	WASHING MACHINE	DRY CLEAN	SPOT CLEAN	STEAMING/ IRON	MAGIC ERASER
RESILIENCE	NO	NO	NO	NO	YES (ONLY ON WHITE)
OXFORD	YES	YES	YES	YES	YES
POWER STRETCH	YES	YES	YES	YES	YES
DISPLAY POLYESTER	YES	YES	YES	YES	YES
DISPLAY POLY CONVERT-IBLES TABLE THROWS	YES (MUST VELCRO THE TABS)	YES (MUST VELCRO THE TABS)	YES	YES	YES
OUTDOOR FLAG	YES	N/A	YES	YES	YES
CANVAS OUTDOOR	NO	NO	YES	STEAM ONLY	YES
CANVAS LIGHTBOX	NO	NO	NO	STEAM ONLY	YES
AGILITY	YES	YES	YES	(ONLY W/ 100% TENSION)	YES
SUPER STRETCH	YES	YES	YES	(ONLY W/ 100% TENSION)	YES
TRIPLE WHITE	YES	YES	NO	YES	NO
SOFT KNIT	YES	YES	YES	YES	YES
SHEER	YES	YES	YES	YES	YES

VINYL & ROLLABLE

	SOLVENT	SOAPY WATER (DAWN®)	WINDEX®
FLATMAXX	ONLY ON WHITE	YES	NO
SCRIM 13OZ/ 18OZ	ONLY ON WHITE	YES	NO
VINYL 20OZ	ONLY ON WHITE	YES	NO
MELINEX	NO	YES	NO
MURAL PANELS	NO	YES	YES
UV RIDGED	NO	YES	YES



Setup notes


1. Redesign of this exhibit without approval by manufacture may result in dangerous and unsafe structures. Manufacture disclaims any responsibility for redesigned exhibits it does not approve in writing.

2.Parts and components such as panels and extrusions are manufactured to metric sizing.Where ever possible sizes have been noted in feet and inches as well as in metric.Below is the imperial to metric sizing table as a reference. 'Nominal' refers to approximate sizes.

IMPERIAL TO METRIC SIZES


8' Nominal = 94 1/2" or 2400mm Actual
4' Nominal = 47 1/4" or 1200mm Actual
3' Nominal = 35 7/16" or 900mm Actual
2' Nominal = 23 5/8"or 600mm Actual
1' Nominal = 11 13/16"or 300mm Actual


TOP DOWN LAYOUT

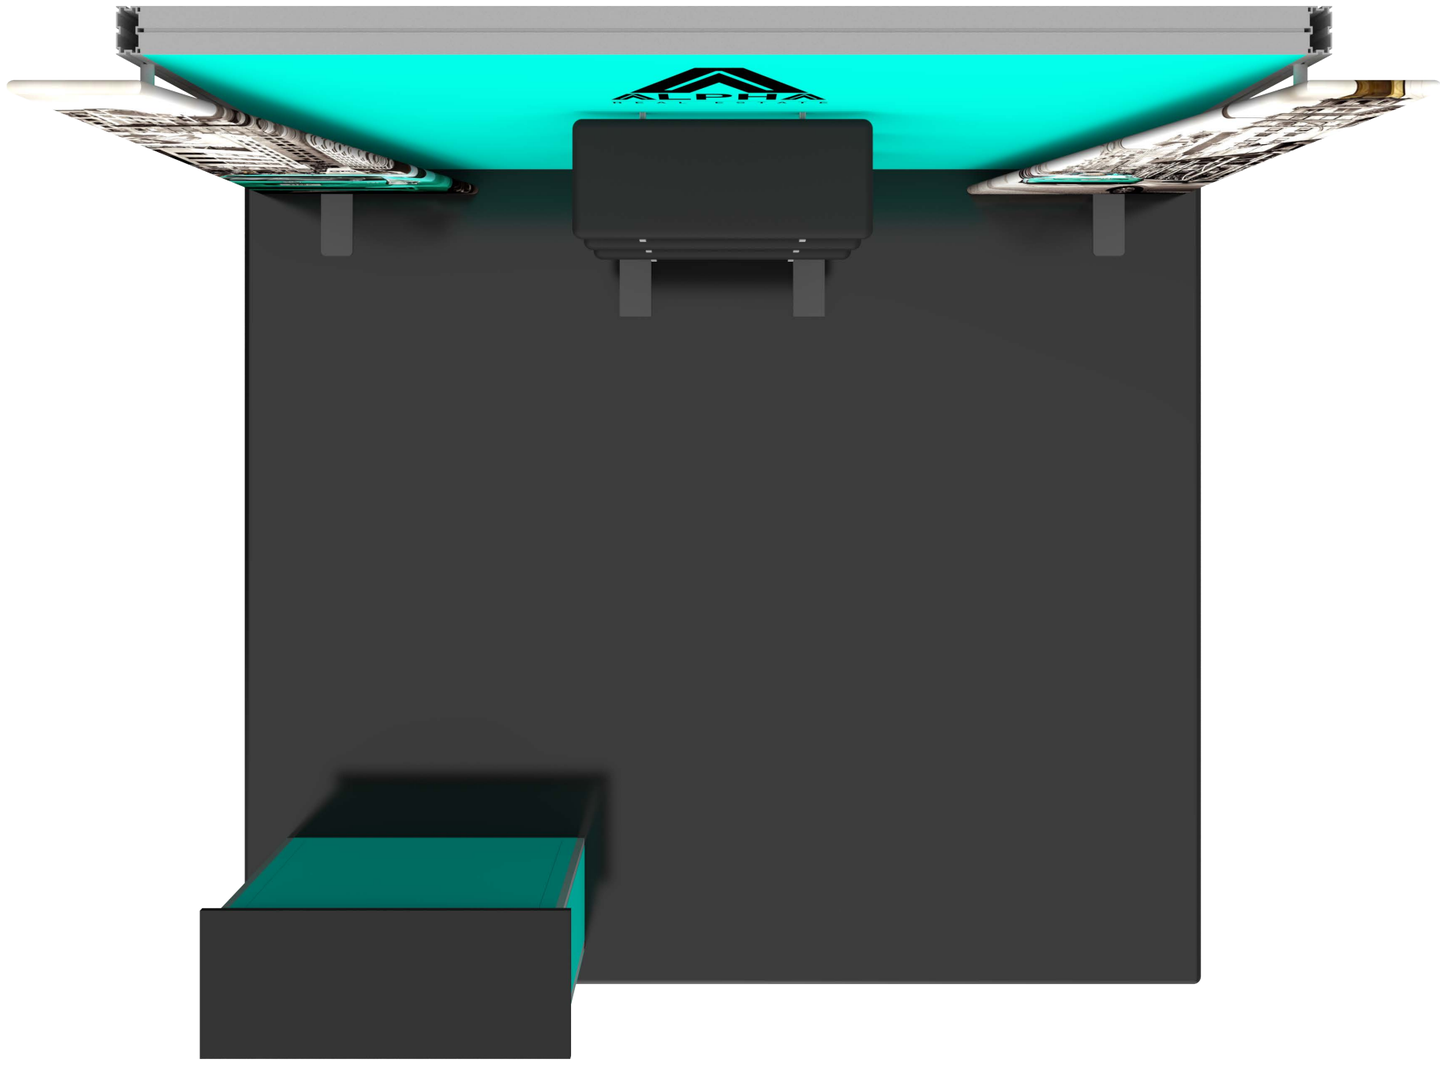



VECTOR FRAME


Code	#	Description
A5	4	PHFC4-1200 EXTRUSION-WITH IB2 LOCK HOLE-WITH MITRE CUT FOR CB9-SIDE
A2	4	PHFC4-1200 EXTRUSION-WITH IB2 LOCK HOLE-WITH MITRE CUT FOR CB9
CB9	4	90 DEGREE JOINER
IB2	5	JOINER BAR(NEW DESIGN)
A4	2	1200MM PM4S3-1200 EXTRUSION-WITH STOP AT 165MM-WITH NUT INSERT
A3	2	1200MM PM4S3-1200 EXTRUSION-WITH STOP AT 165MM
A6	2	300MM PH2-TG EXTRUSION
A7	2	1155MM PH1 EXTRUSION-WITH IB2 LOCK HOLE-CAM LOCK

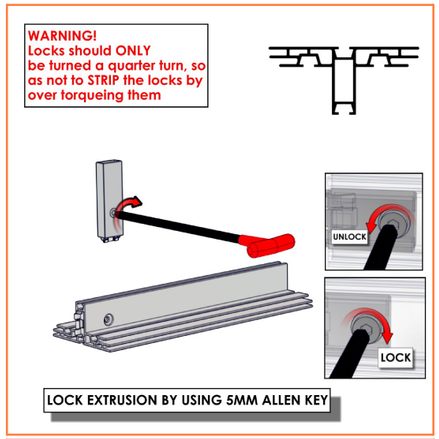


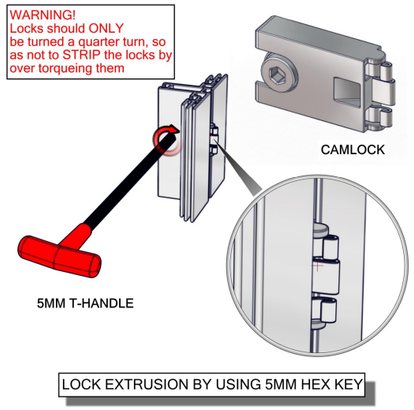


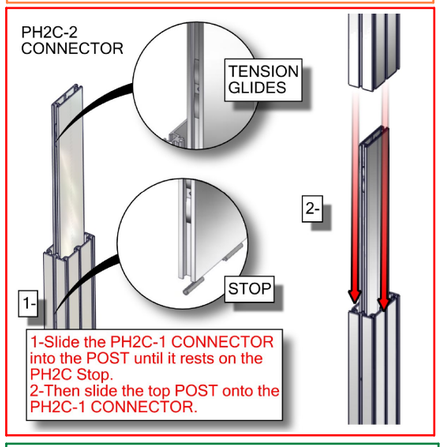

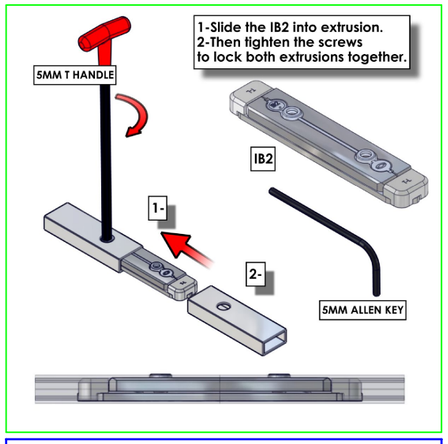

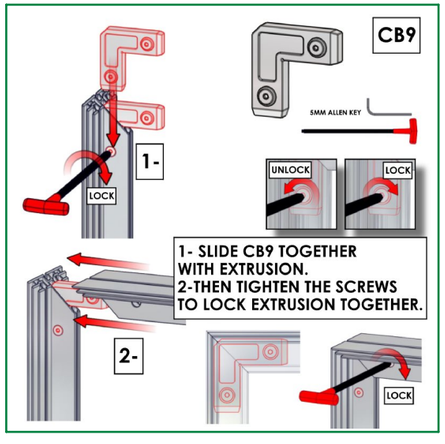


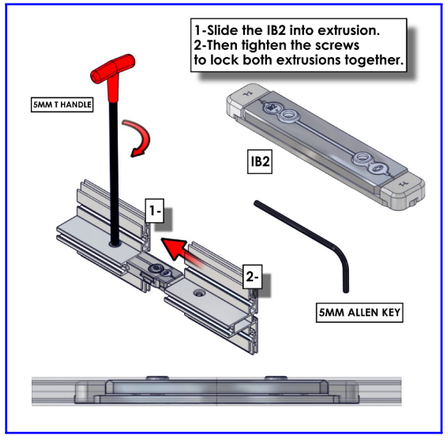

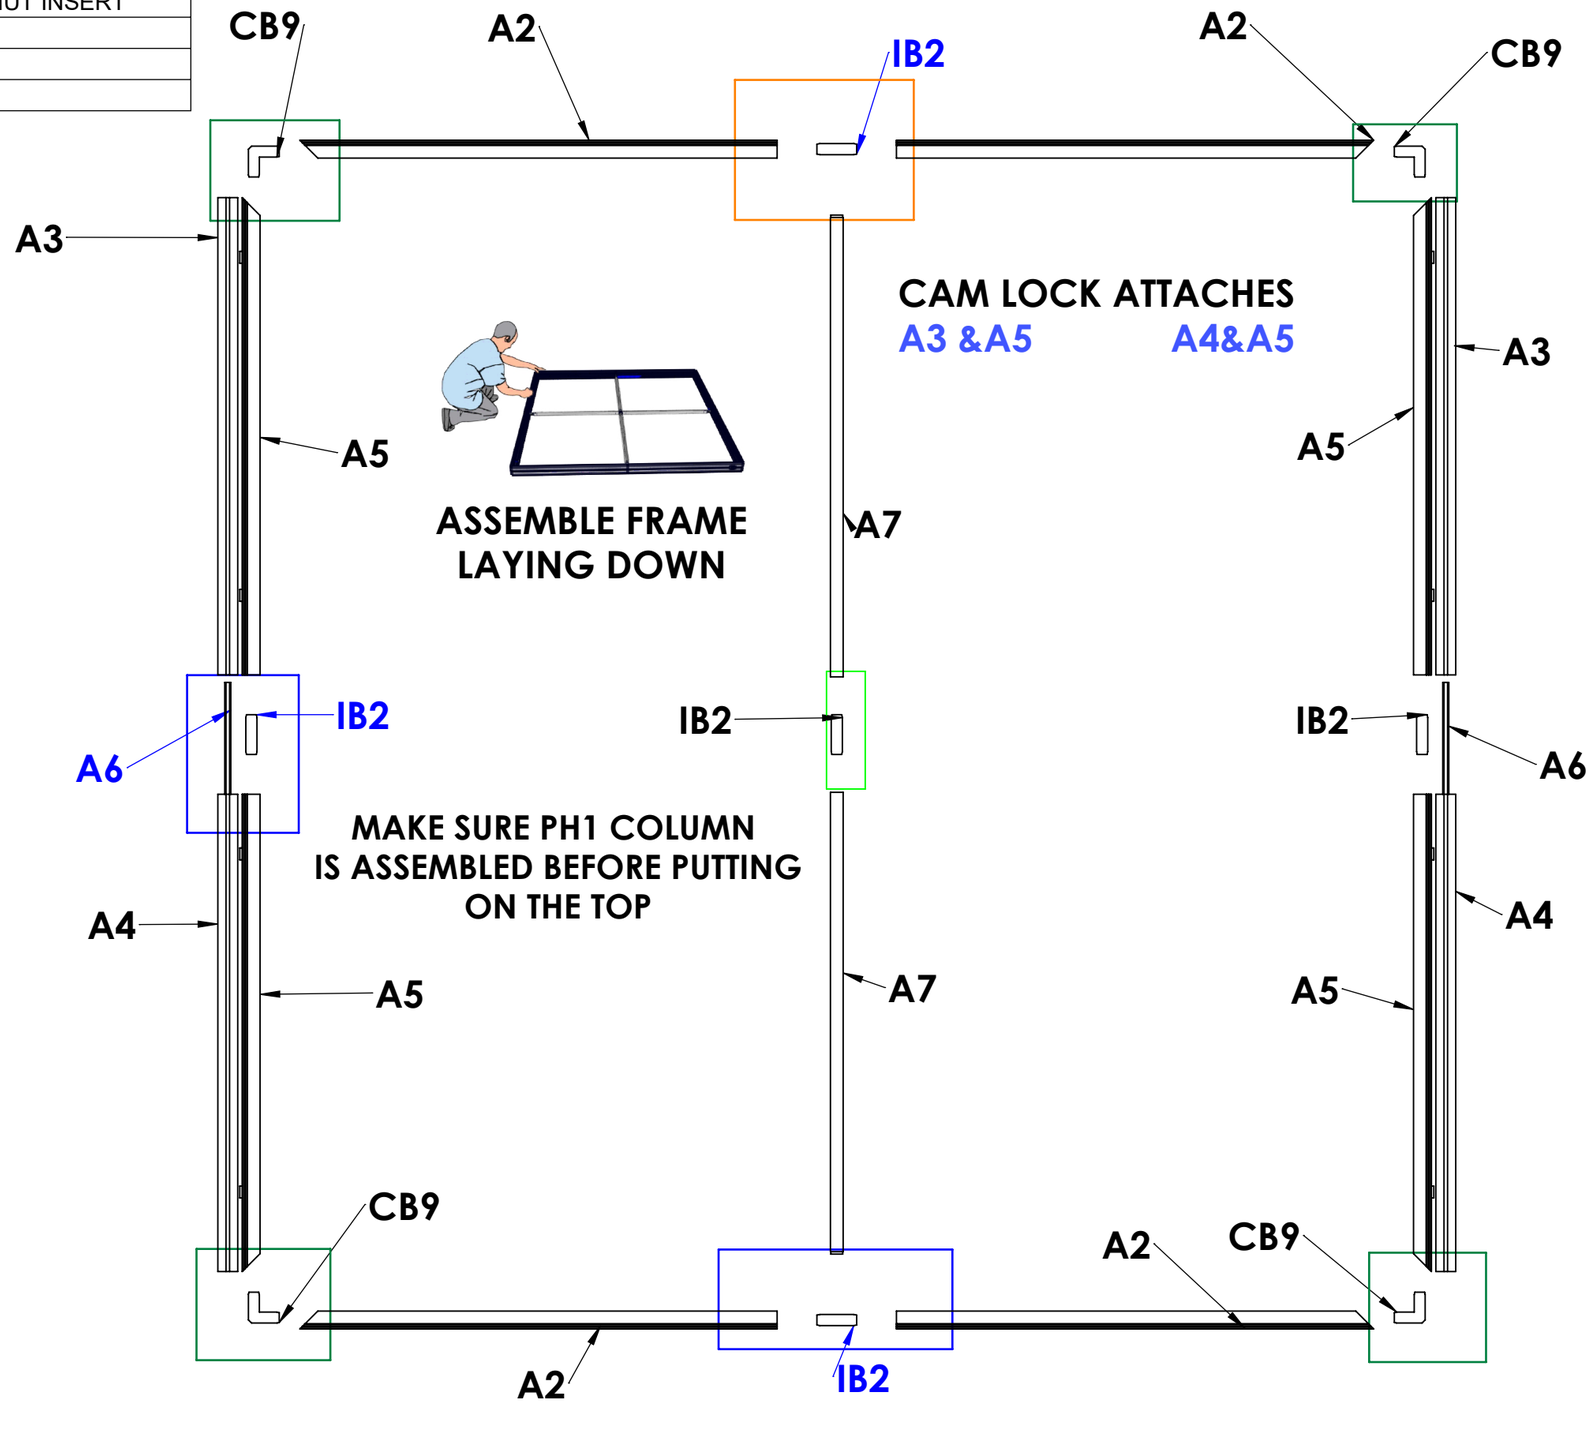



VECTOR FRAME FEET INSTALL

Code	#	Description
LN114-S2-650	2	FOOT PLATE , 650MM LENGTH

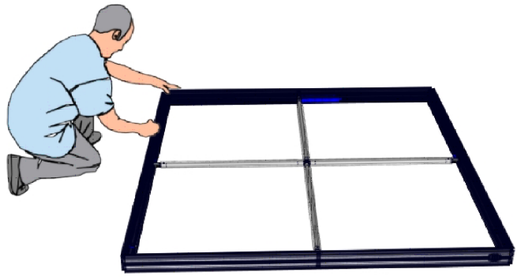

INSTALL FEET WHILE THE FRAME IS LAYING DOWN DO NOT STAND UP TILL AFTER GRAPHICS ARE INSTALLED

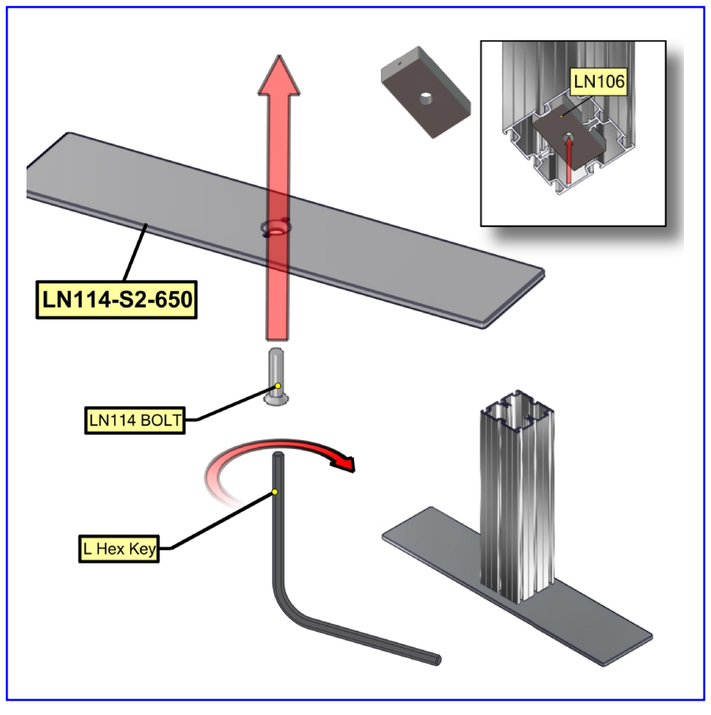

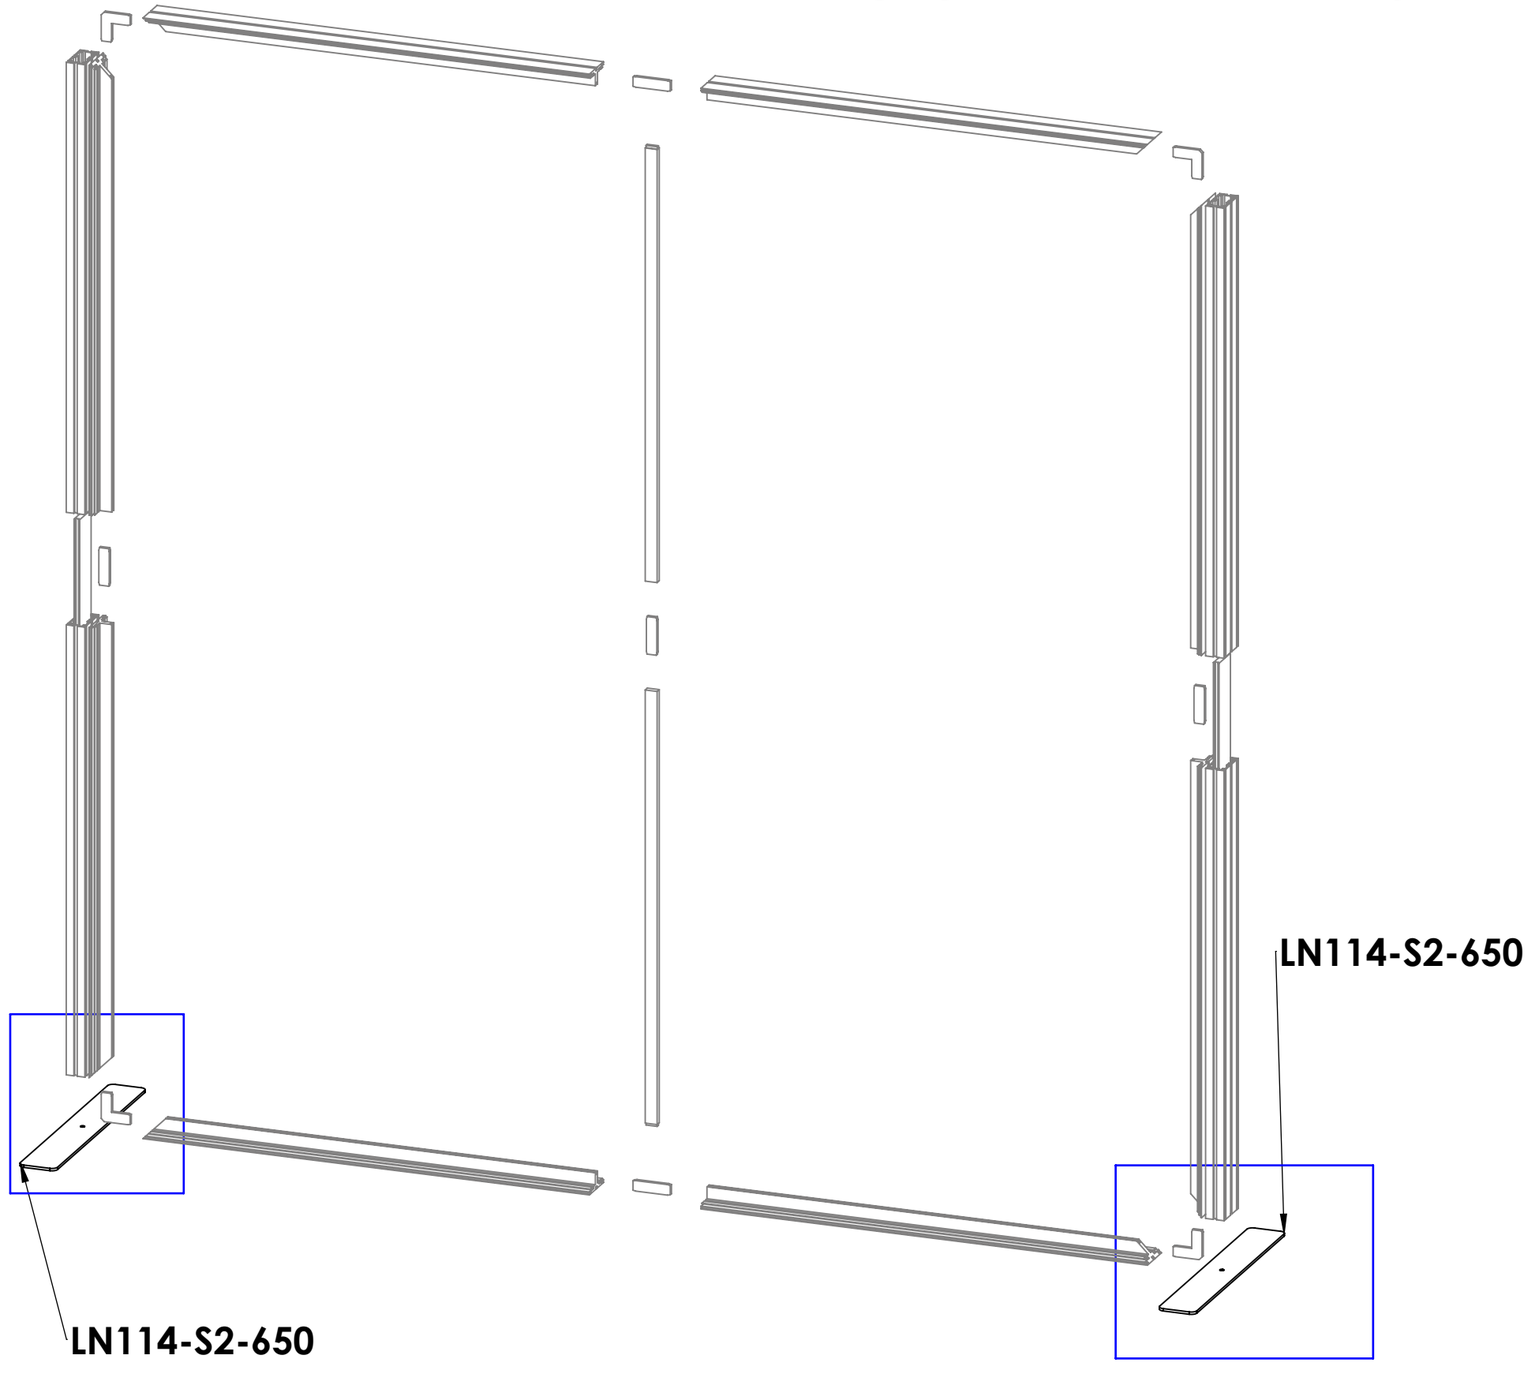

Freestanding Monitor Kiosk

PM4S3-MK-M PM4S3-MK-M-MSHELF PM4S3-MK-SHELF-UNIT
PM4S3-MK-L PM4S3-MK-L-MSHELF

The Freestanding Monitor Kiosk is a superior multimedia display that can be used for multiple applications, as well as in trade show exhibits and for events. Kiosks include monitor mounts to support a medium or large size TV, and a corresponding medium or large shelf may be added. Monitor mounts support TV's up to 40 lbs and 32" - 65" in size, and can be adjusted to the perfect height; an included shelf can hold up to 15 lbs. The Shelf Unit is a great addition that proudly displays small products. Install the Freestanding line behind a fabric backwall for a truly impressive display.



Freestanding Monitor Kiosk



Freestanding Monitor Kiosk with Shelf



Freestanding Shelf Unit

features and benefits:

- Premium aluminum extrusion frames with cam lock and tension glide assembly
- Easy to store and ship
- Quick to set up
- Weighted feet for added stability
- Kits may include: a medium or large monitor mount, shelf, or combination
- Choice of medium or large shelf for display opportunities (Freestanding Monitor Kiosk with Shelf or Freestanding Shelf)
- Lifetime limited hardware warranty against manufacturer defects

dimensions:

Hardware	Shipping
Assembled unit (no shelf): 25.59"w x 70.98"h x 25.59"d 650mm(w) x 1803mm(h) x 650mm(d) Assembled unit (with shelf): 29.53"w x 70.98"h x 25.59"d 751mm(w) x 1803mm(h) x 650mm(d) Approximate weight: (excludes cases & monitor mount) 40 lbs / 19 kgs Add 10 lbs / 5 kgs for each shelf	Packing case(s): 1 OCE Case Shipping dimensions: OCE: Expandable case length (l) may vary 40" - 66"l x 18"h x 18"d 1016mm-1677mm(l) x 458mm(h) x 458mm(d) Approximate total shipping weight: Monitor Kiosk: (Case & monitor mount) Medium 83 lbs / 38 kgs Large 85 lbs / 39 kgs Monitor Kiosk with Shelf: (Case, monitor mount, & shelf) Medium 93 lbs / 43 kgs Large 95 lbs / 44 kgs Shelf Unit: (Case & shelves) 116 lbs / 53 kgs

additional information:

-Medium monitor mount can hold 32-55" monitor/ max weight 40lbs

-Large monitor mount can hold 40"-65" monitor/ max weight 40lbs

-Monitor not included

-Shelf can hold suggested max weight: 15 lbs

-If shipping with backwall kit cases may vary


We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

Included In Your Freestanding Monitor Kiosk


Tools, Components, Connectors & Extrusions



5MM ALLEN-T x1

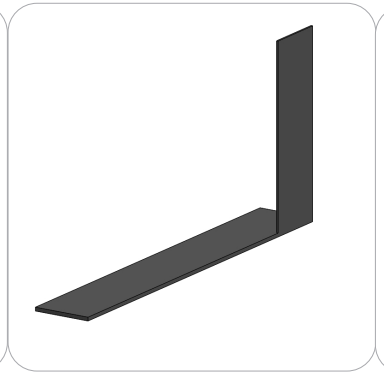


PM4S3-MM-FOOT-L x1

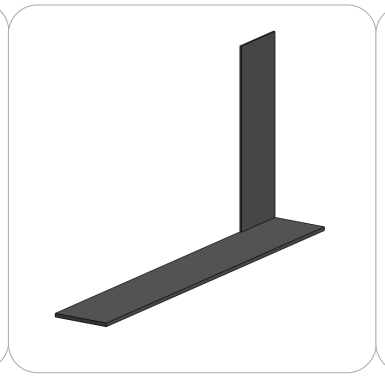


PM4S3-MM-FOOT-R x1




LN100 x6

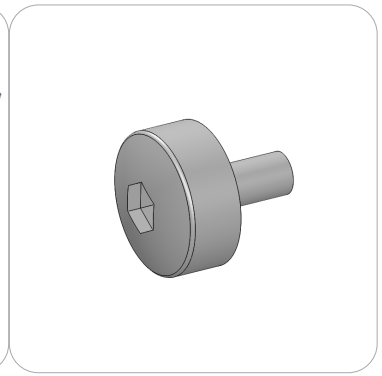


M5 THUMBSCREW x8

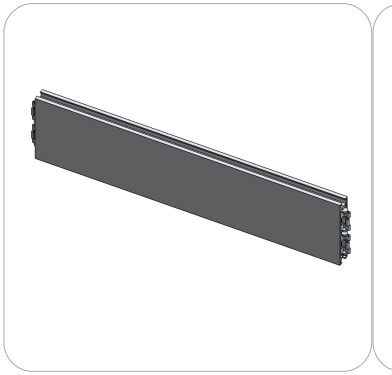


PH2-350-L-L x3

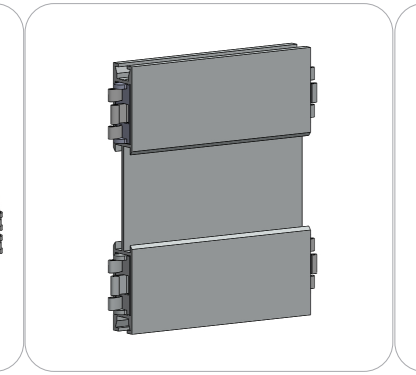

PH5-100-L-L x2

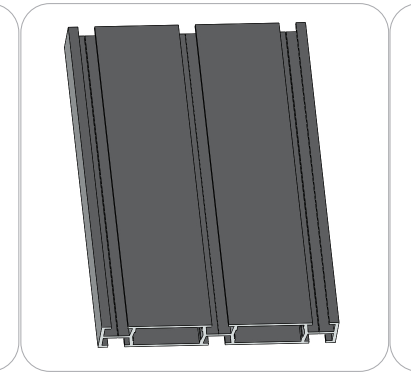

PM4S4-150 x2

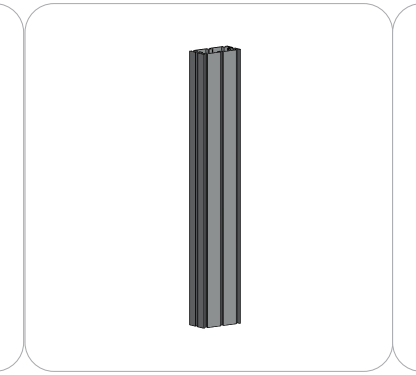

PM4S3-600-A165-A165 x2



PM4S3-1200-A165-A165 x2



PH2-300-TG x2



EXT-M-MB (or) EXT-LG-MB x1
Fastening Hardware Included




Included In Your Freestanding Shelf


Tools, Components, Connectors & Extrusions



5MM ALLEN-T x1

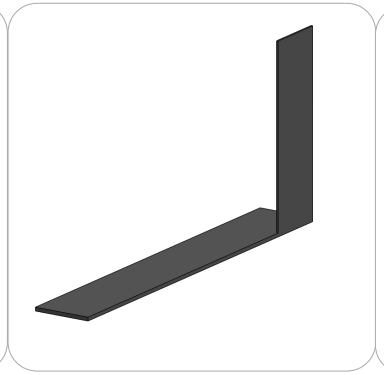


PM4S3-MM-FOOT-L x1

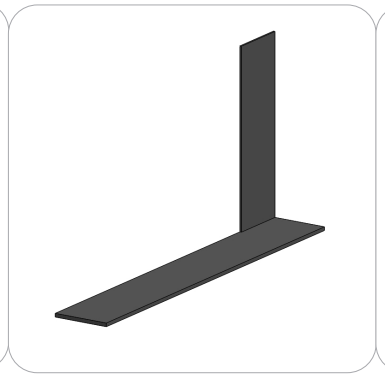


PM4S3-MM-FOOT-R x1




LN100 x6

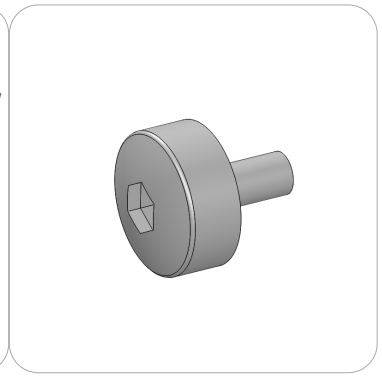

M5 THUMBSCREW x8

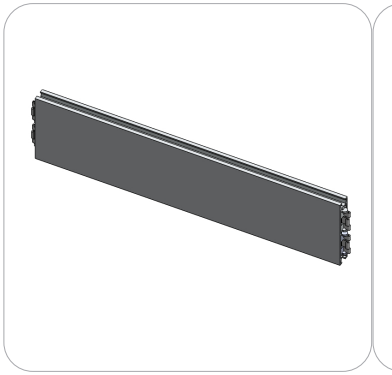


PH2-350-L-L x3

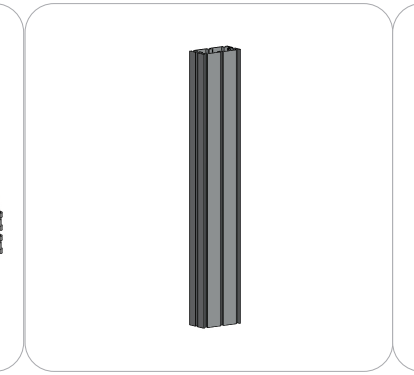


PM4S3-600-A165-A165 x2




PM4S3-1200-A165-A165 x2

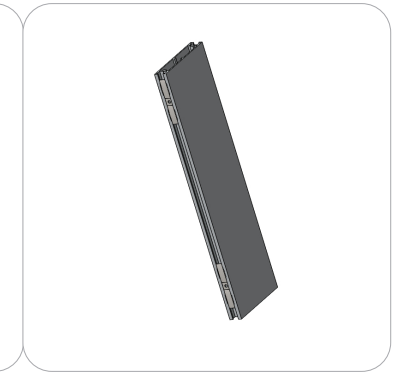

PH2-300-TG x2

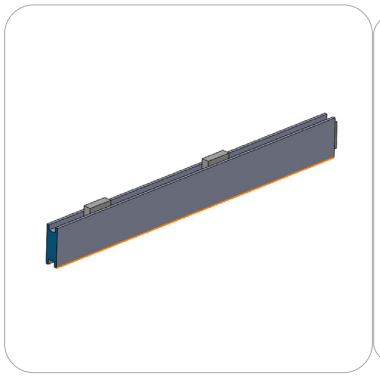

PH-400-L-SIDE-MK x6

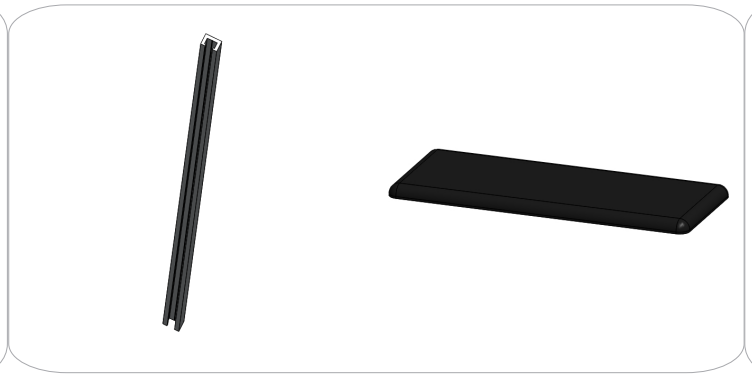

PE-1200 x6
*will ship preattached to shelf

CT21-MK-SHELF x3




LN605-EN x6



Exploded View

PM4S3-MK-SHELF-UNIT

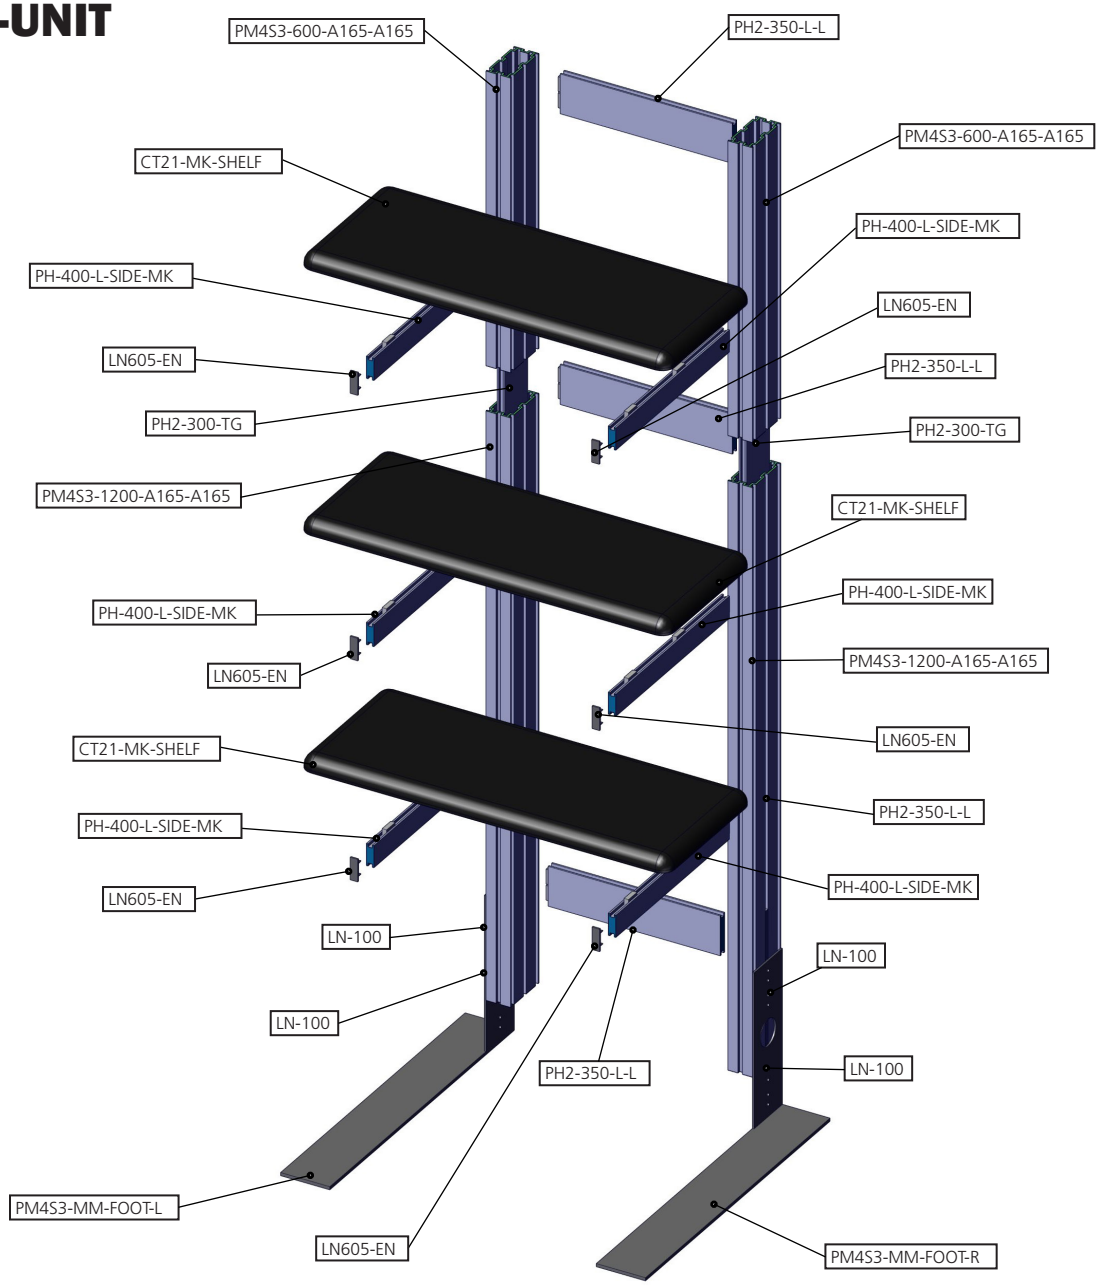


Kit Assembly

Step by Step

Step 1.


Reference the image to the right. Locate the coded extrusions. Slide the PH2-300-TG connector into one end of the PM4S3-1200-A165-A165 so that it goes as deep as the internal pins. Connect the PM4S3-600-A165-A165 by sliding it over the PH2-300-TG. Repeat for this step for the second vertical.




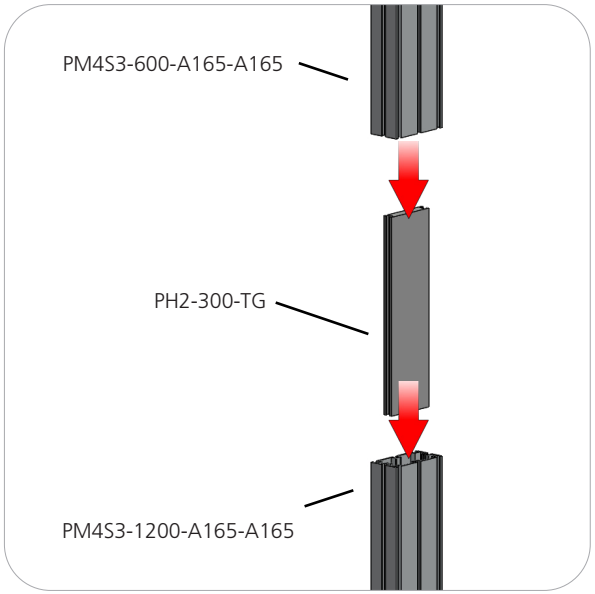

Step 2.

Collect your extrusions and handtool. Using the provided handtool, lock the extrusions into the back channel of the three channel PM4S3 faces as shown in the image below.
Be sure the locks face toward the back of the assembly and do not over tighten.




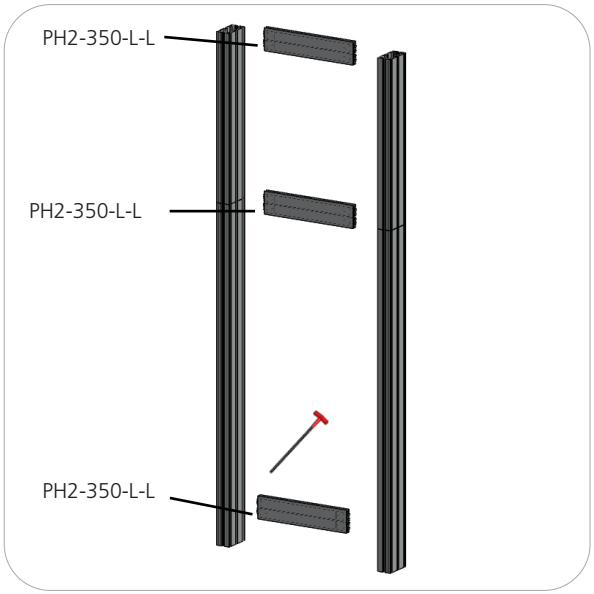

Step 3.


Locate the M5 thumbscrews, LN100s, and the PM4S3-MM stabilizing bases. Slide the LN100s into the middle channel of the PM4S3. Hand screw the M5 thumbscrews through the base holes and into the LN100 holes. Use the handtool to securely fasten the M5 Thumbscrews. Do not over tighten.



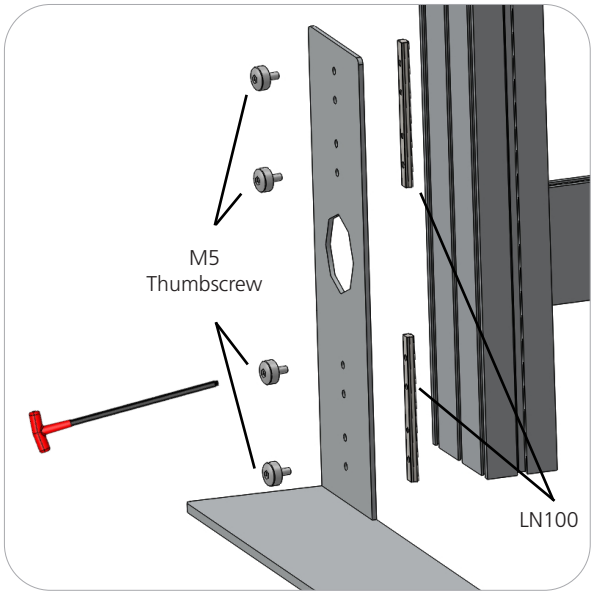

STOP

Orbus recommends that you move your kiosk(s) in place before continuing on with the rest of assembly.

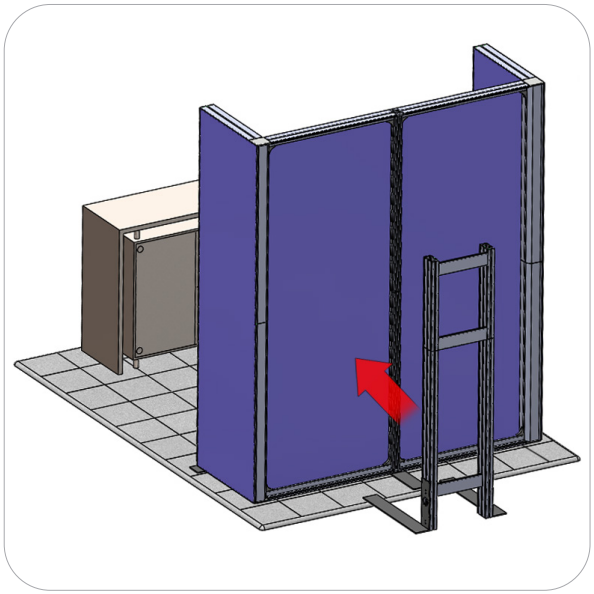


Kit Assembly

Step by Step - Shelf

Step 7.

Insert the LN605-EN end caps. Lock the CT21-MK-SHELF to the PH-400-L-SIDE-MK. Do not over tighten.



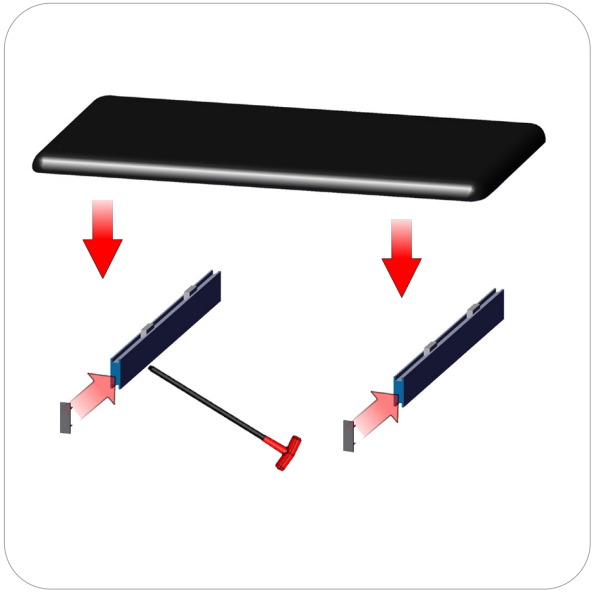

Step 8.

Lock your PH-400-L-SIDE-MK into the PM4S3 stacks at the desired dimension height. Do not over tighten.

Refer to the attached supplemental sheet for details on shelf height(s).


Setup is complete.

Repeat steps 7 and 8 twice more for Shelf Unit.



Freestanding Display Shelf

PM4S3-MK-SHELF
Freestanding display shelves are easily attached to your assembled kiosk for displaying promotional materials. This shelf can be added to a Freestanding Monitor Kiosk order.

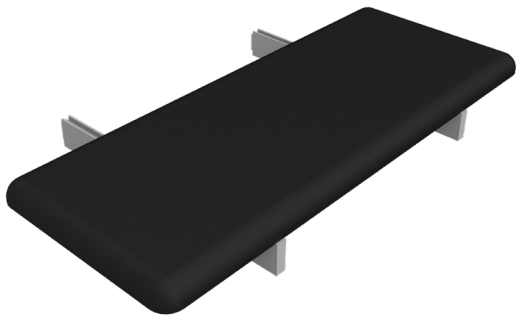

features and benefits:

- Premium aluminum extrusion frames with cam lock and tension glide assembly
- Easy to store and ship
- Quick to set up
- Lifetime limited hardware warranty against manufacturer defects
- Great for display opportunities

dimensions:

Hardware	Shipping
Assembled unit: Medium or Large 29.53”w x 6.35”h x 15.87”d 751mm(w) x 162mm(h) x 404mm(d) Approximate weight (shelf): 10 lbs / 5 kgs	Ships in box Shipping dimensions: Special order - 30”(l) x 16”(h) x 4”(d) 762mm(l) x 407mm(h) x 102mm(d) Approximate total shipping weight: 12 lbs / 6 kgs

additional information:


-Shelf can hold suggested max weight 15lbs

-If shipping with backwall kit cases may vary

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

Exploded View

PM4S3-MK-SHELF

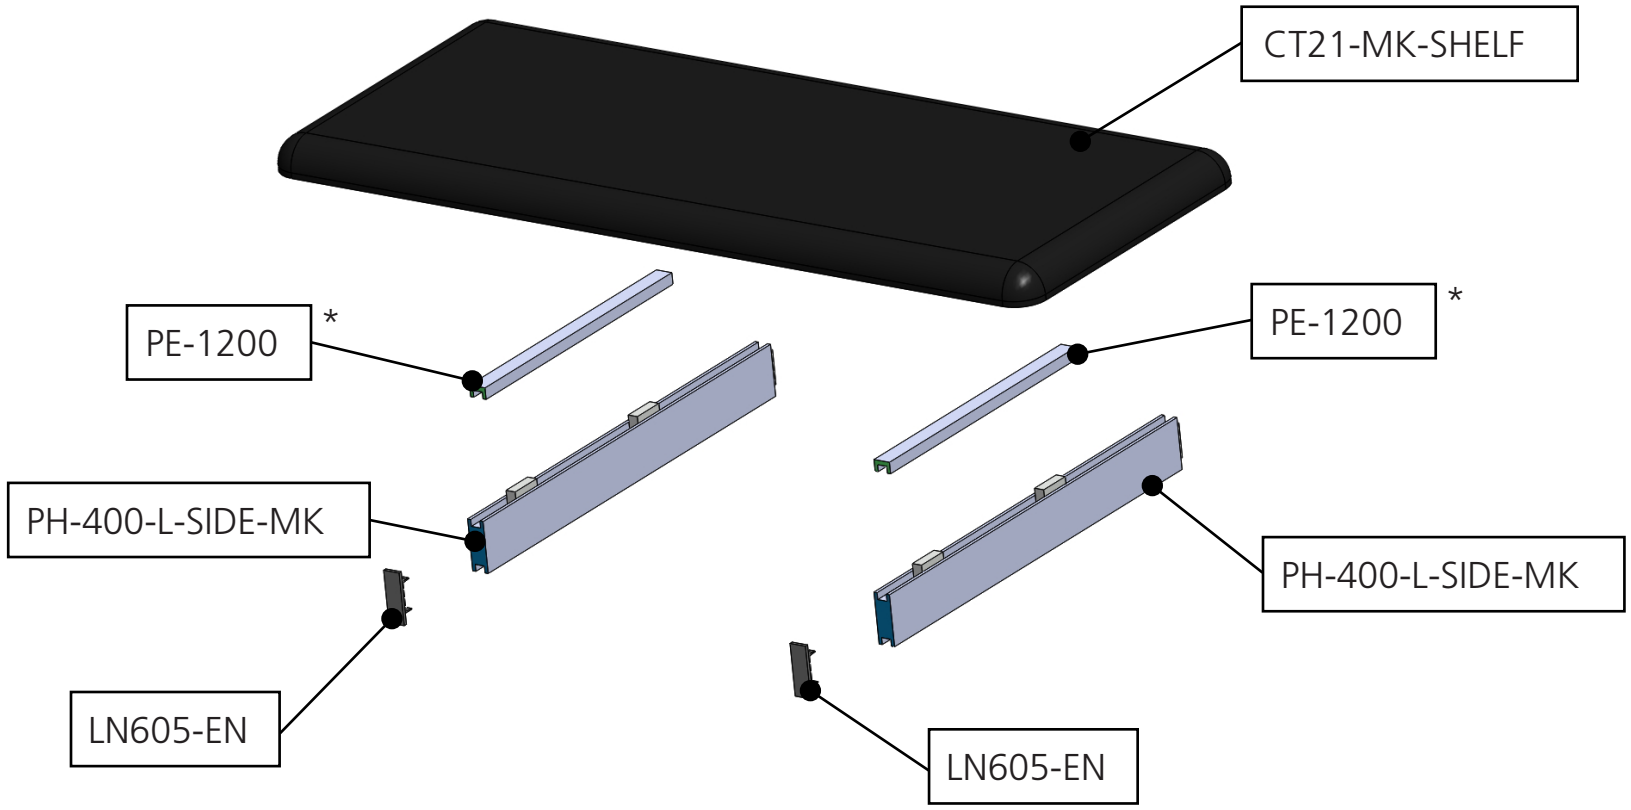

*Note: PE will ship preattached to shelf


Kit Assembly

Step by Step - Shelf

Step 8.

Insert the LN605-EN end caps. Lock the CT21-MK-SHELF to the PH-400-L-SIDE-MK. Do not over tighten.



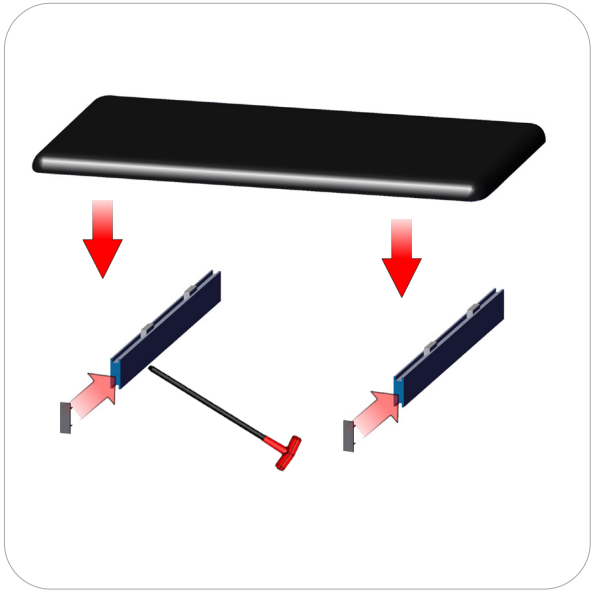

Step 7.

Lock your PH-400-L-SIDE-MK into the PM4S3 stacks at the desired dimension height. Do not over tighten.

Refer to the attached supplemental sheet for details on shelf height(s).

Setup is complete.


Repeat steps 7 and 8 twice more for Shelf Unit.






Location of vinly adhesive tape
Tape color-CLEAR


Indicator shown in green to show detail




TORQUATA
Self-Adhesive Measuring Tape

Note: tape comes preattached to extrusion, 0” starts from the bottom (at the floor)

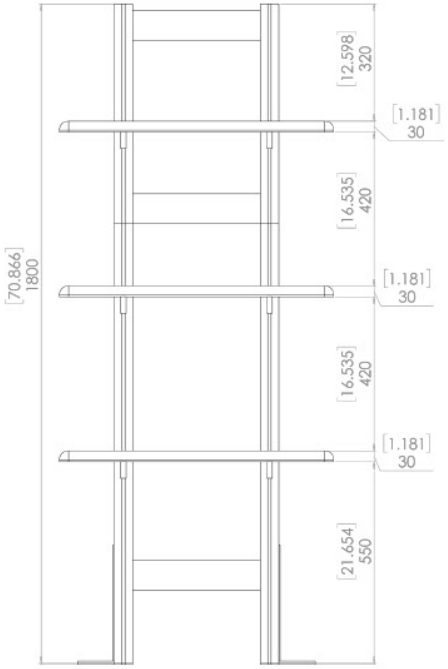

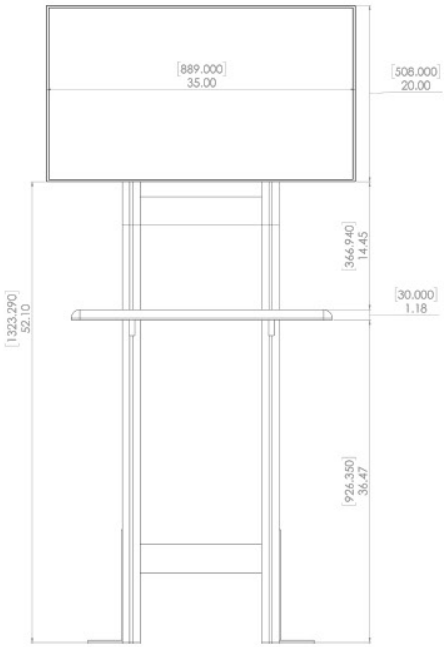


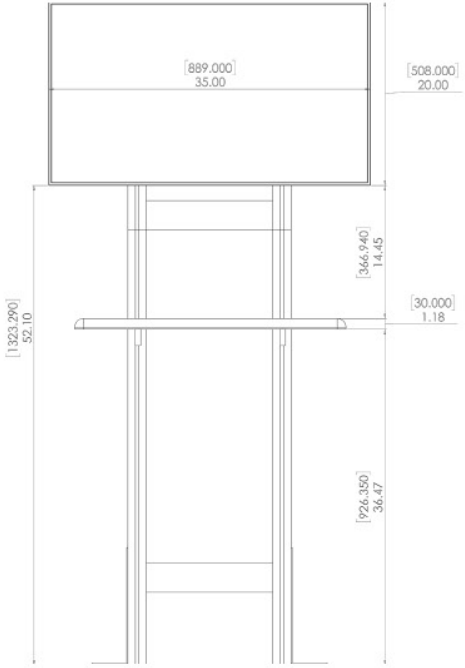


GRAPHICS 1

Code	#	Description
HP-K-27-G-B1	1	GRAPHIC(B1) 94.37 w X 94.37 h finished size Dye-sub print on 8oz. Power Stretch, with FCE-2 silicone beading sewn to back perimeter, corner pull sewn in bottom right corner
HP-K-27-LN-B2	1	LINER(B2) 94.37 w X 94.37 h finished size Opaque liner, with FCE-2 silicone beading sewn to back perimeter, corner pull sewn in bottom right corner

FCE-2 TO PHFC4

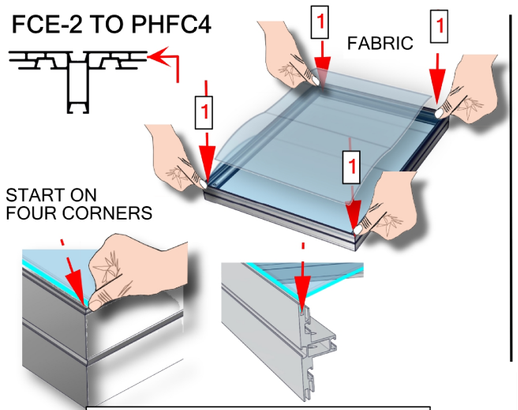


1- Install fabric by pressing the FCE-2 into 4 CORNERS of the frame.

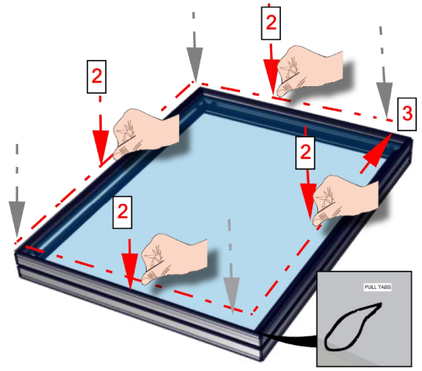

2- Then, press FCE-2 at the middle of Fabric.
3- Press all around perimeter.
MAKE SURE FABRIC IS FACING THE OUTSIDE PERIMETER OF THE FRAME WORK.


FCE-2 TO PHFC4

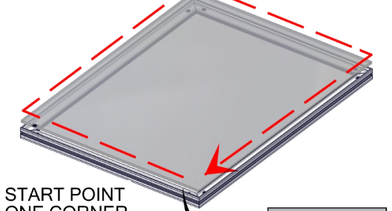


START POINT
ONE CORNER



Install Blank Unprinted by pressing the FCE-2 into the channels of PHFC4 extrusion. To pull liner out of the channels, use tabs on the front side

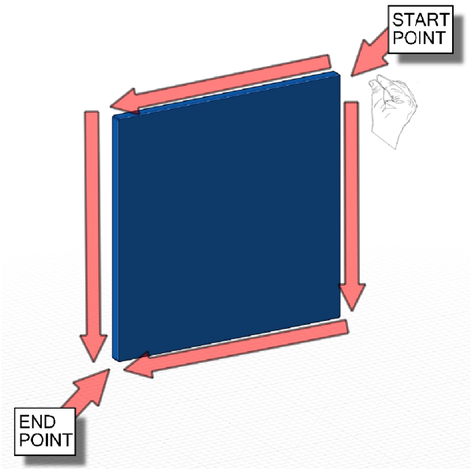


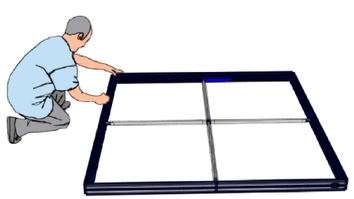

STAND UP AFTER THE FRONT GRAPHIC IS INSTALLED

HP-K-27-G-B1

HP-K-27-LN-B2

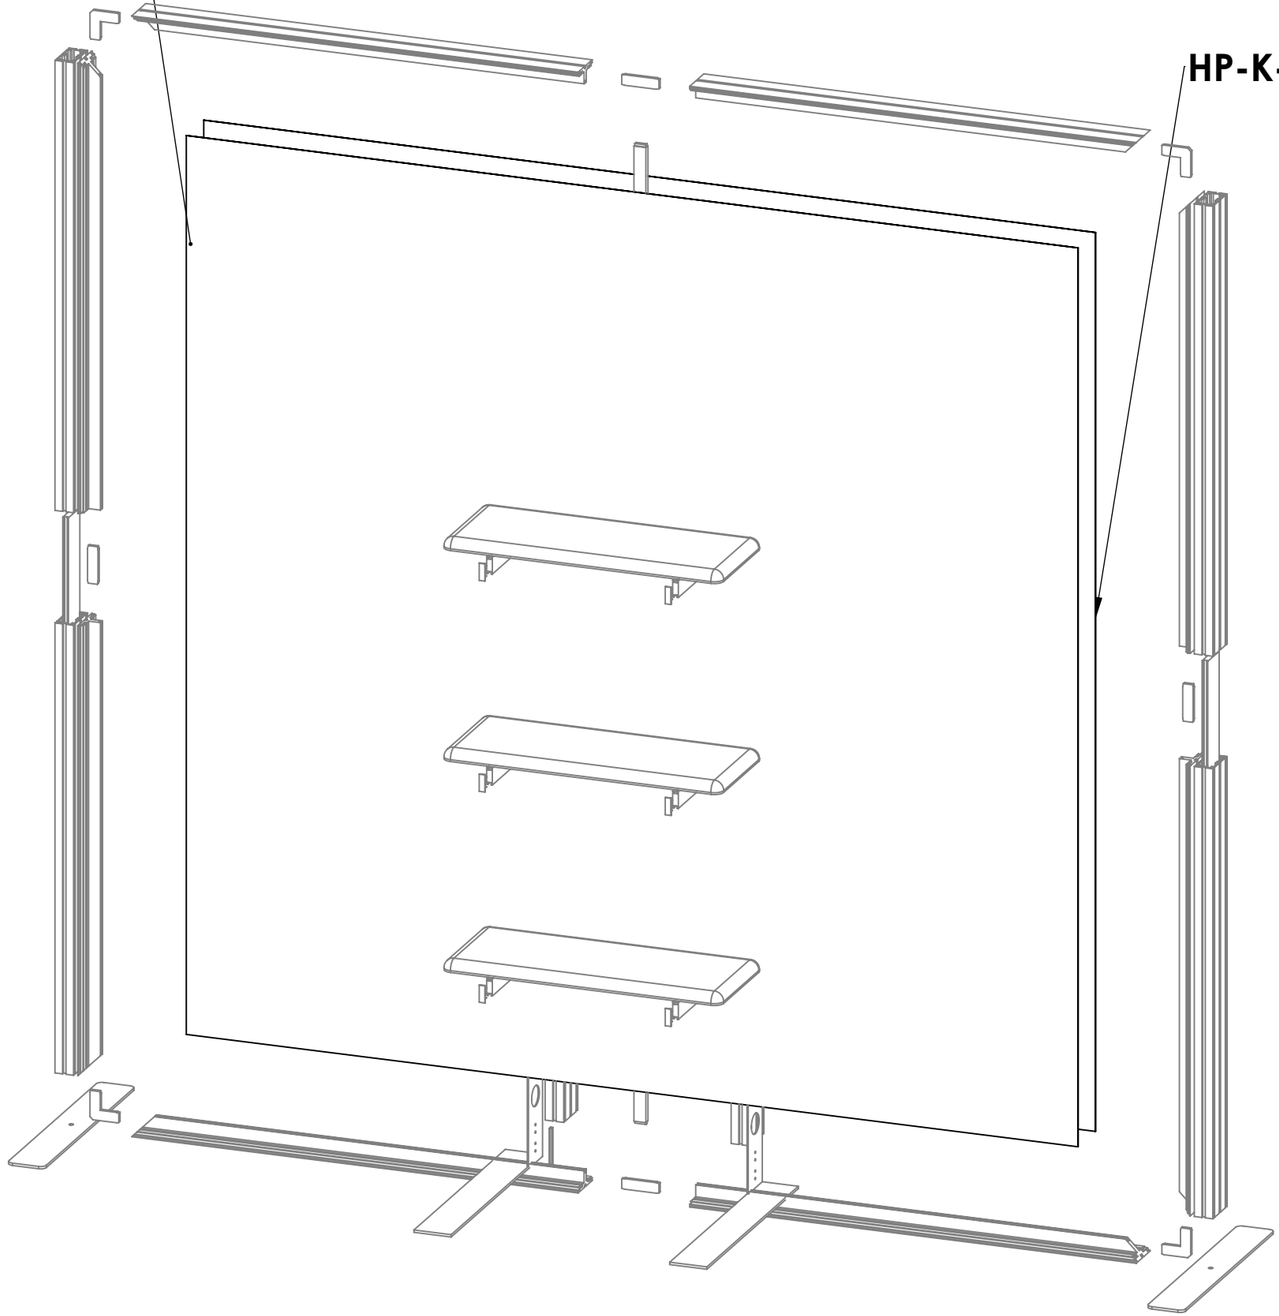

LABELING DIAGRAM FOR HP-K-27-A&B-SQU

SET UP INSTRUCTIONS:


1. CONNECT BOTTOM AND TOP TUBES FOLLOWING THE LABELS
2. CONNECT SIDE TUBES
3. CLEAN THE FRAME AND PLACE THEM ON CLEAN PLACE
4. CAREFULLY REMOVE FABRIC COVER FROM BAG
5. PLACE COVER AROUND THE BOTTOM OF THE FRAME
6. PULL COVER CAREFULLY UP TO THE TOP
7. CLOSE ALL ZIPPERS
8. ADJUST FABRIC AROUND THE FRAME
9. CONNECT CABLE HARNESS TO THE EYEBOLTS
10. COMPLETELY TIGHTEN THREADED CONNECTORS

BREAK DOWN INSTRUCTIONS:
REVERSE SET-UP STEPS TO BREAKDOWN FRAME

FABRIC CARE INSTRUCTIONS:
1. UNZIP COVER ZIPPERS
2. CAREFULLY REMOVE FABRIC COVER
3. CLOSE ALL ZIPPERS
4. FOLD OR ROLL NEATLY
5. PLACE FABRIC IN COVER BAG

ZIPPER ON BOTTOM OF BOTH

HP-K-27-A
HP-K-27-B




STEP #1:
SLIDE THE JOINER INTO THE TUBING SO THE THE HEX SCREW SITS IN THE HOLE ON THE TUBINGER


STEP #2:
TIGHTEN THE HEX SCREW SO THE JOINER SEPERATES AND
TIGHTENS AGAINST
THE INSIDE OF THE TUBING, LOCKING THE JOINER AND TUBING TOGETHER






HP-K-27-B

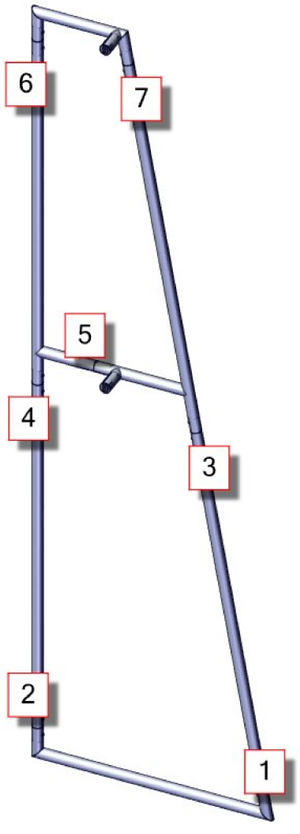


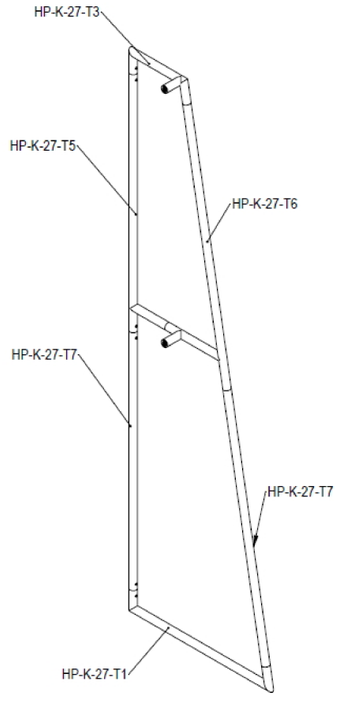

PARTS DIAGRAM

HP-K-27-A

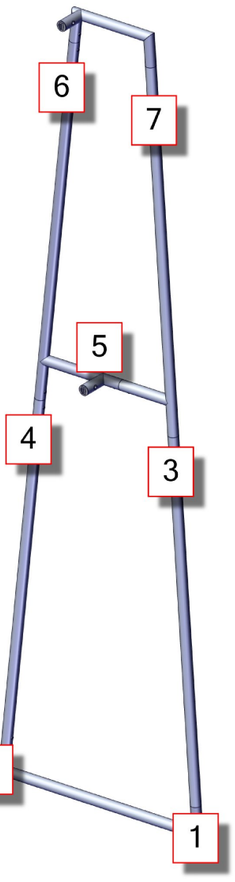

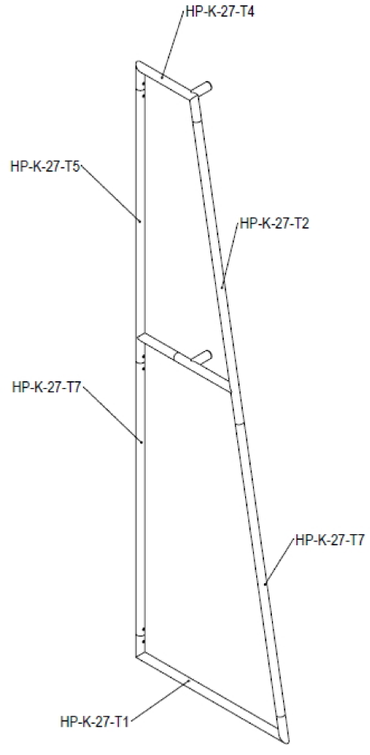



PARTS DIAGRAM


FABRIC STRUCTURE GRAPHICS

Code	#	Description
CUS-FABSTR-2	1	600MM X 2400MM, 30MM CUSTOM FABRIC STRUCTURE
CUS-G-PS-PC-G	1	GRAPHIC(C1) 23.62 w x 94.50 h Pillowcase Graphic, dye-sub print on 8oz. Power Stretch, single sided, sewn with zipper.
CUS-FABSTR-1	1	600MM X 2400MM, 30MM CUSTOM FABRIC STRUCTURE
CUS-G-PS-PC-G	1	GRAPHIC(A1) 23.62 w x 94.50 h Pillowcase Graphic, dye-sub print on 8oz. Power Stretch, single sided, sewn with zipper.

HAVE TWO PEOPLE HELP WHILE YOU INSTALL THE FABRIC STRUCTURE

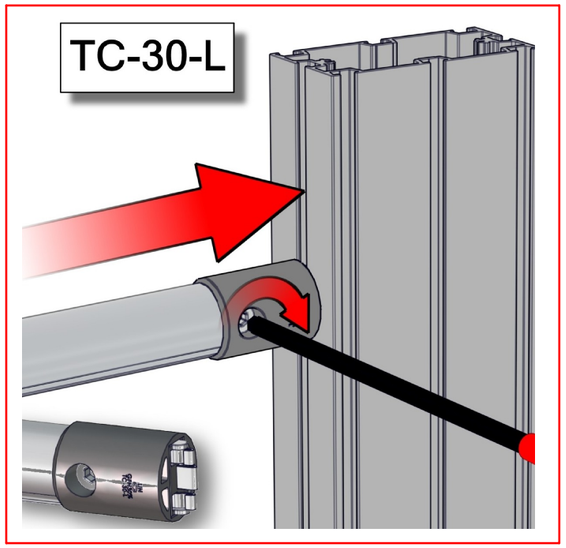

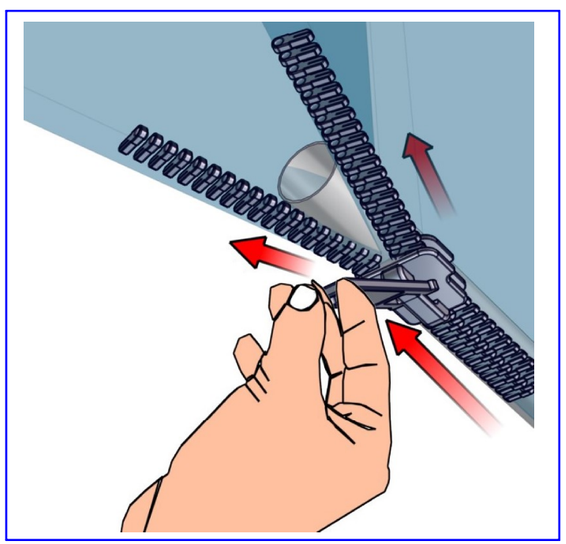

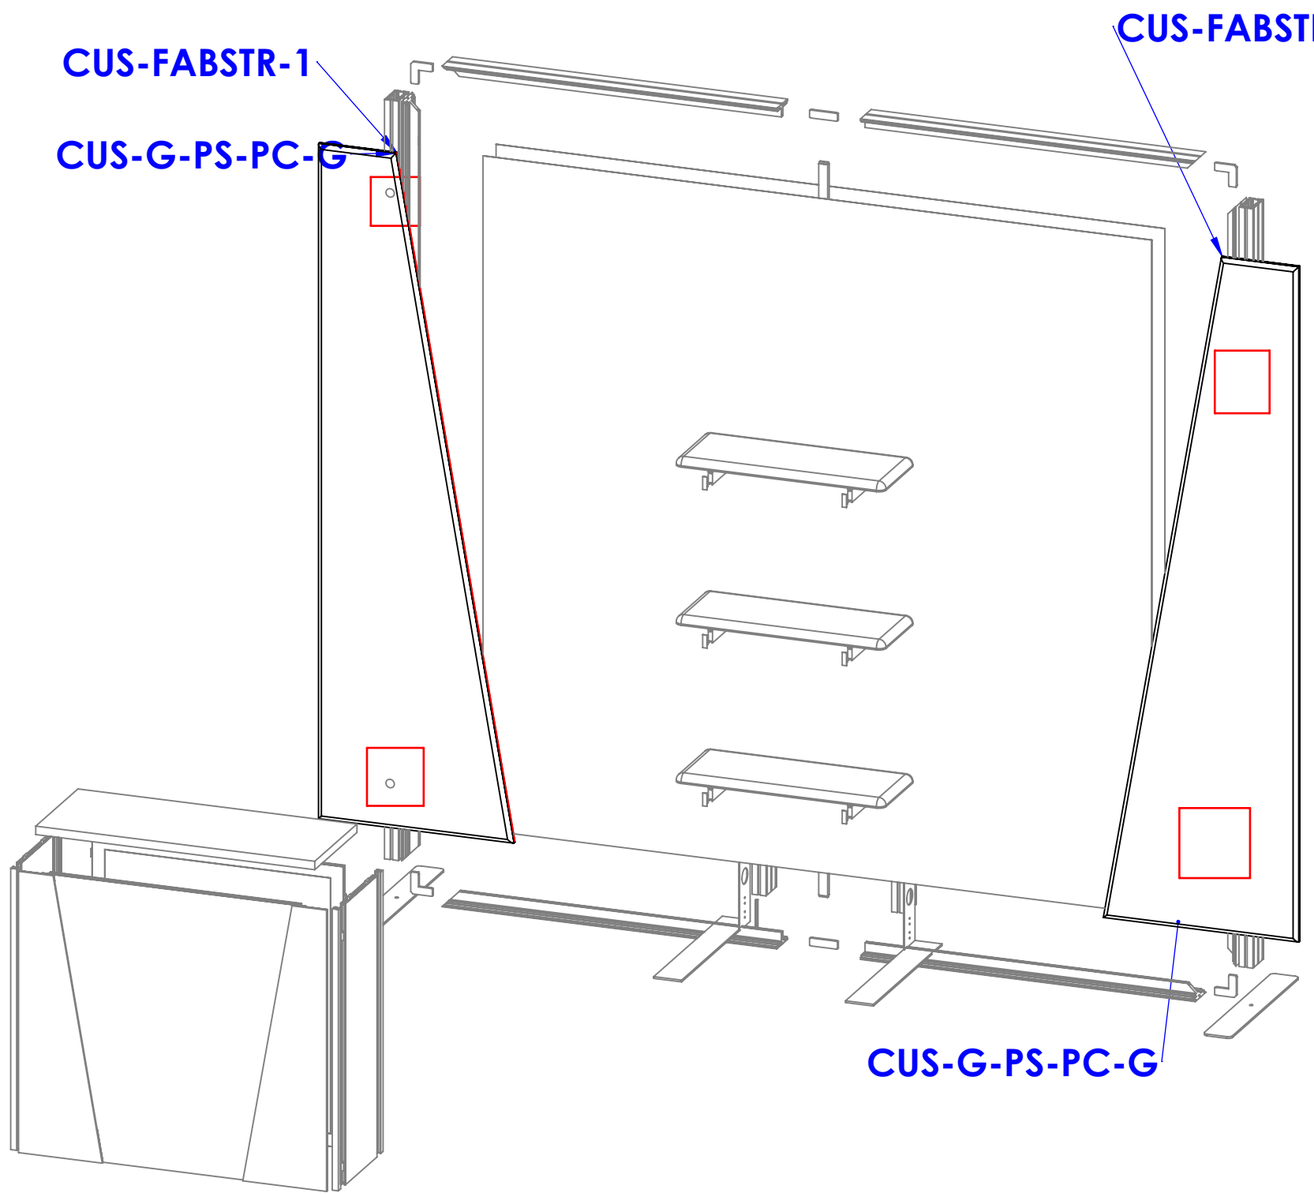

Hybrid Pro Counter 03

HPC-03
All Hybrid Pro™ Modular counters feature accessible storage and locking doors. Purchased printed fabric graphics or rigid infill panels allow for your messaging and branding.



features and benefits:

- White laminate cabinet
- UV graphic
- Locking storage door in back
- Laminated counter top in choice of color
- Easy step-by-step instructions
- Kit includes laminated cabinet, locking storage door, one molded case
- Lifetime hardware warranty against manufacturer defects

dimensions:

Hardware	Graphic
Assembled unit: 39.375”w x 36.625”h x 15.75”d 1000mm(w) x 930.27mm(h) x 400mm(d) Counter holds max weight 50 lbs / 22.68 kgs	Total visual area: (UV Graphic - Rollable) Front Panel: 37.25”w x 35.18”h Door Graphic: 31.62”w x 31.75”h Please be sure to include a .5” bleed around the perimeter. If ordering Hybrid Pro Kit 10, please design on the door template. If ordering free-stanading counter, please design on both the front and the door template. Refer to related graphic templates for more information Visit: www.exhibitors-handbook.com/graphic-templates
Shipping	
Shipping dimensions - requires 1 OCFM: OCFM case: 49”l x 39”h x 15”d 1245mm(l) x 991mm(h) x 381mm(d) Approximate shipping weight (entire kit): 92 lbs / 41.7 kgs	

additional information:


Graphic material:
UV graphic


Tabletop colors options:

silver black mahogany natural

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

R-HPC-03

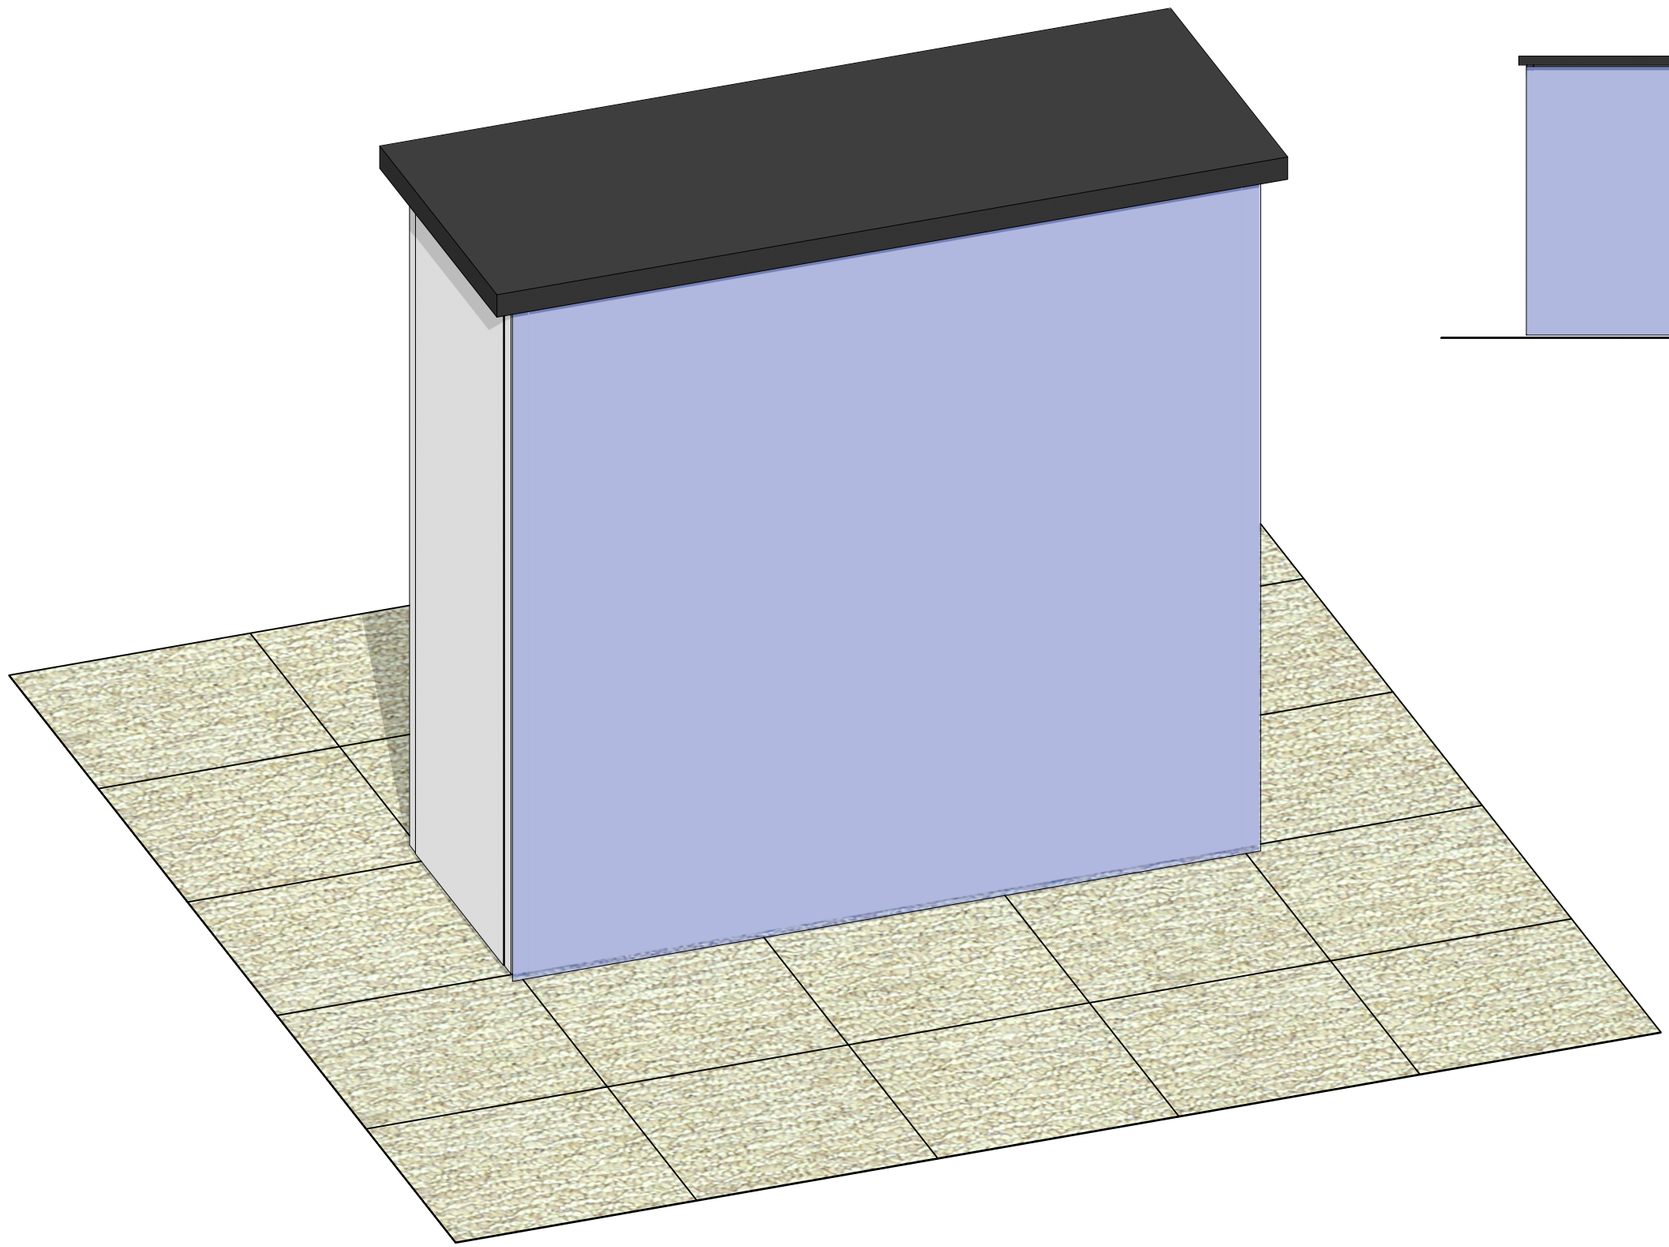


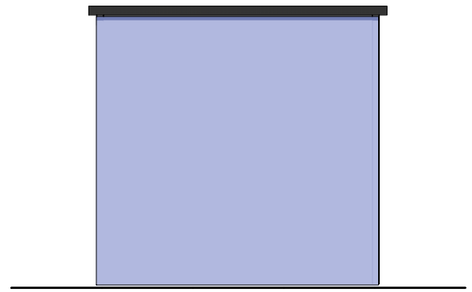



Code	#	Description
R58	2	3 X 1 (900MM X 300MM) LAMINATE PANEL
R57	1	3 X 3 (900MM X 900MM) LAMINATE PANEL
L90S-900	4	900MM (35.43") 90 DEGREE SILVER LINK EXTRUSION90 DEGREE
CT-42L	1	4' X 2' LAMINATE COUNTER TOP
R56	1	900MM V x 900MM W LAMINATE CABNET DOOR
GRAPHIC D1 -D2	1	35.18" (H) X 37.25" (W) ROLLABLE DETACHABLE DSG GRAPHIC WITH MAGNET ON BACK PERIMETER□□


BOM


R-HPC-03

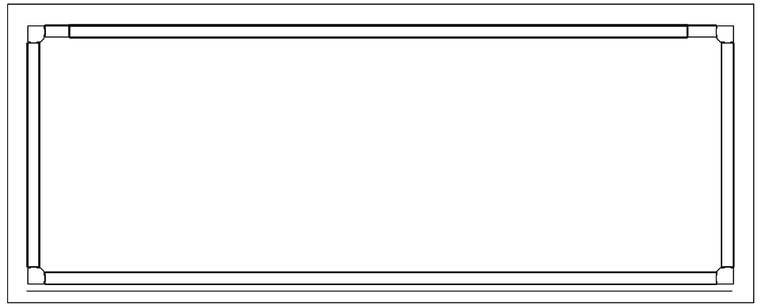


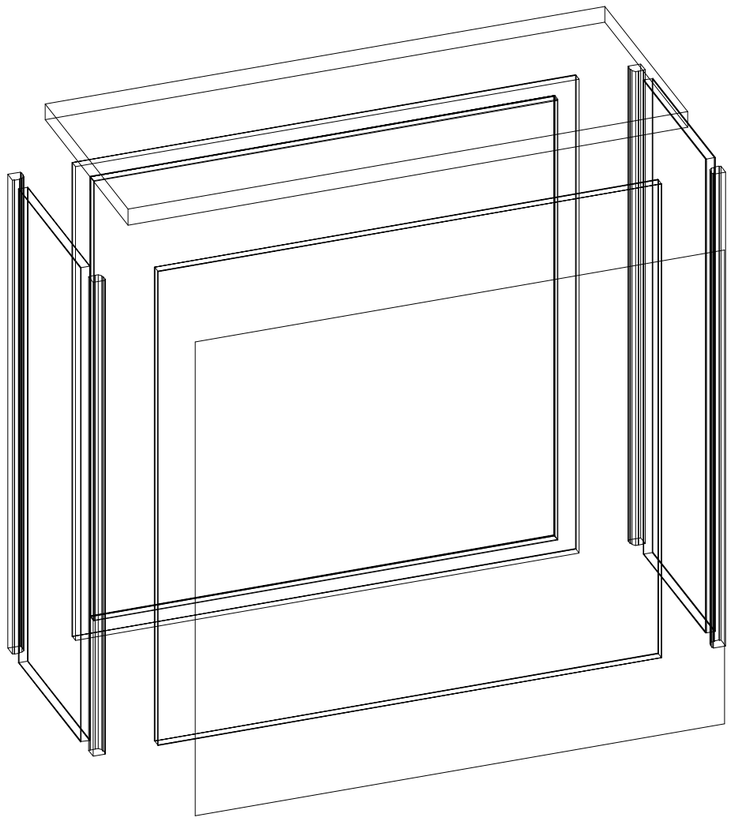



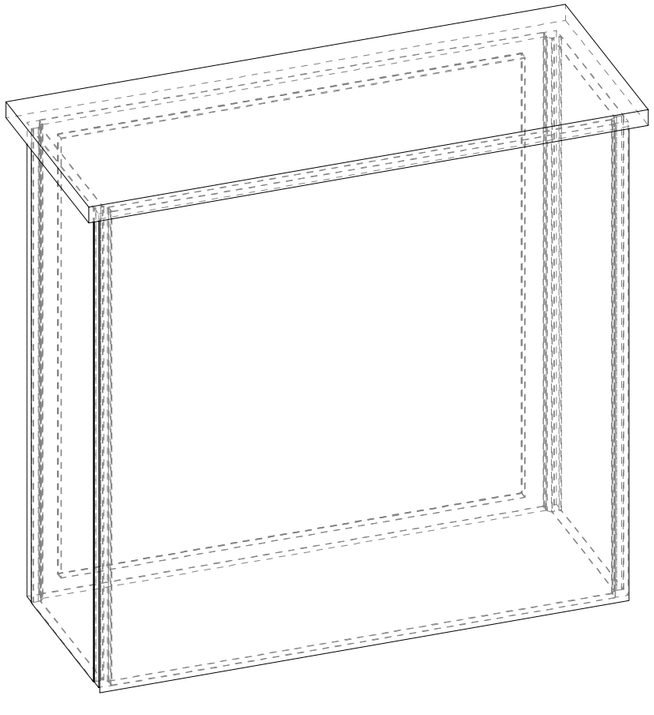

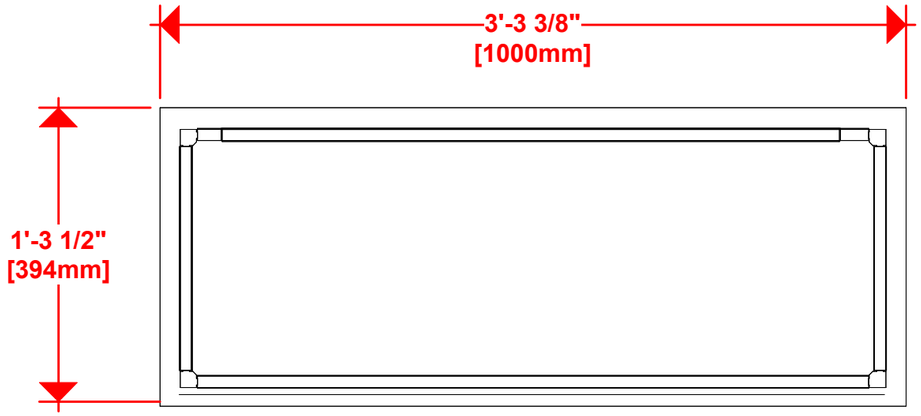

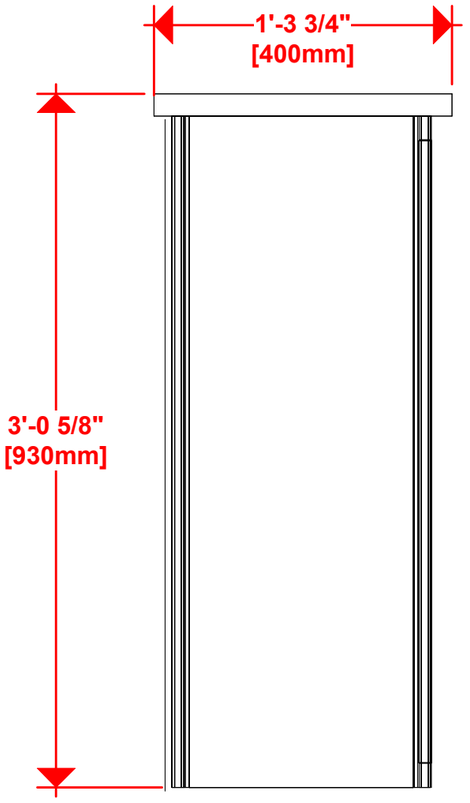


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")
2100mm = (82 5/8")
1800mm = (70 7/8")
1500mm = (59")
1200mm = (47 1/4")
900mm = (35 1/2")
600mm = (23 5/8")
300mm = (11 7/8")

Phone Line / Fax
Internet connection
Outlet
Main Drop (point of distrution)
Wire running under carpet

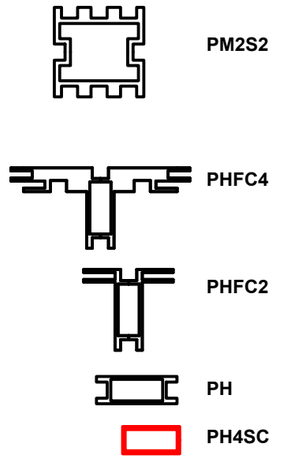



HYBRID PRO RENTAL KIT


Title: SET-UP INSTRUCTIONS


EP

	Code	#	Description
	R58	2	3 X 1 (900MM X 300MM) LAMINATE PANEL
	R57	1	3 X 3 (900MM X 900MM) LAMINATE PANEL
	L90S-900	4	900MM (35.43") 90 DEGREE SILVER LINK EXTRUSION90 DEGREE
	R56	1	900MM V x 900MM W LAMINATE CABNET DOOR

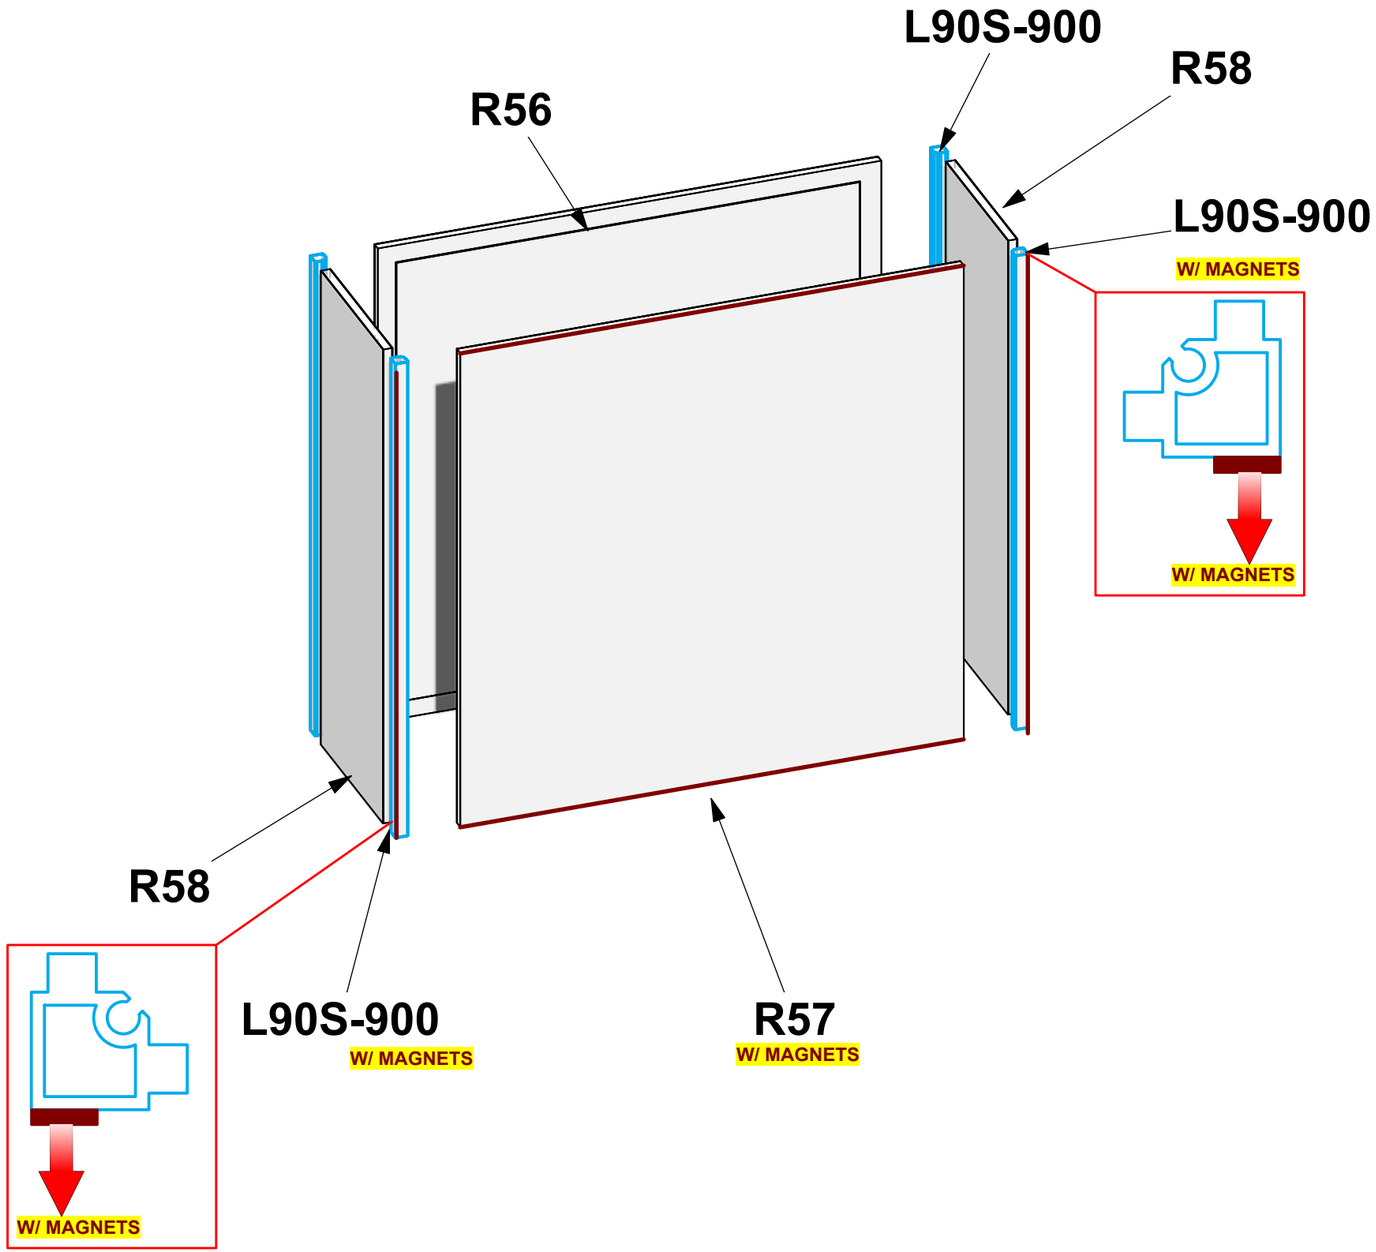

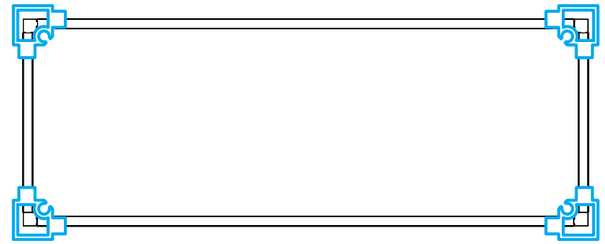

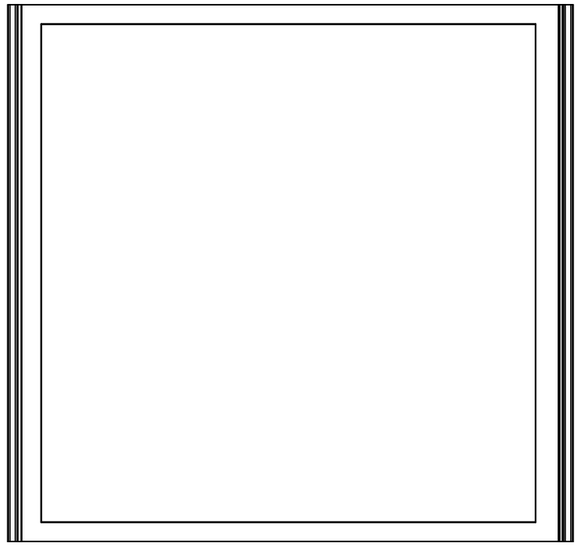

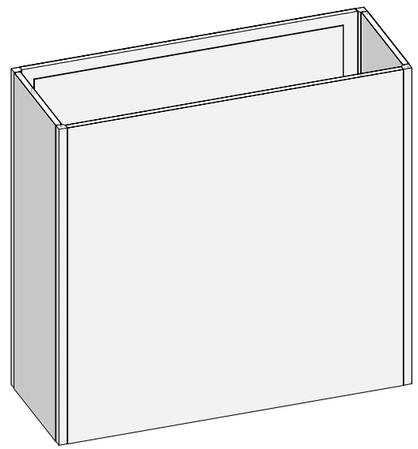


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")
2100mm = (82 5/8")
1800mm = (70 7/8")
1500mm = (59")
1200mm = (47 1/4")
900mm = (35 1/2")
600mm = (23 5/8")
300mm = (11 7/8")


Phone Line / Fax
Internet connection
Outlet
Main Drop (point of distrution)
Wire running under carpet

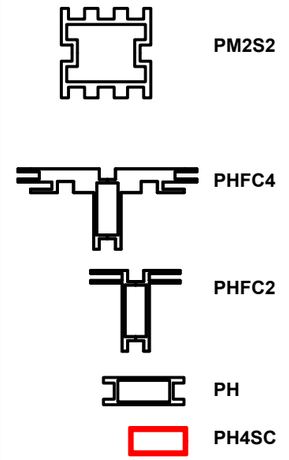



HYBRID PRO RENTAL KIT


Title: SET-UP INSTRUCTIONS

	Code	#	Description
	CT-31L	1	3' X 1' LAMINATE COUNTER TOP
	GRAPHIC D1 -D2	1	35.18" (H) X 37.25" (W) ROLLABLE DETACHABLE DSG GRAPHIC WITH MAGNET ON BACK PERIMETER

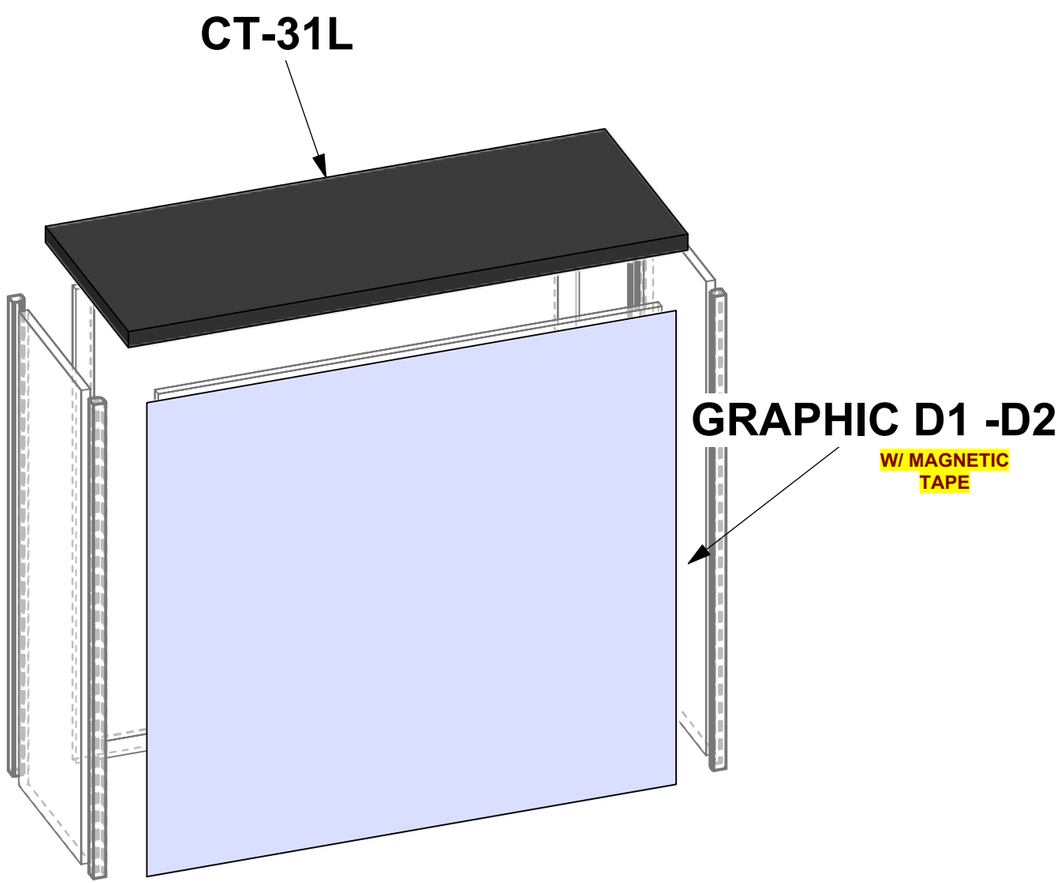

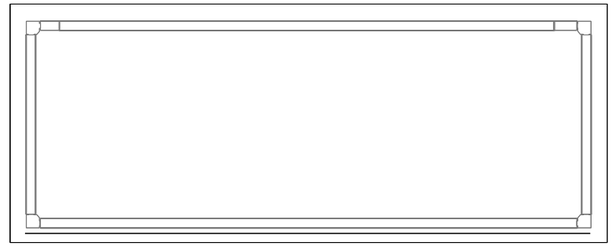

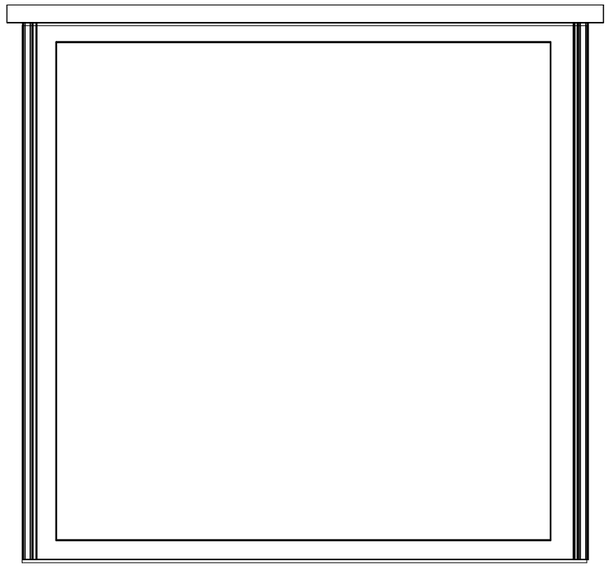

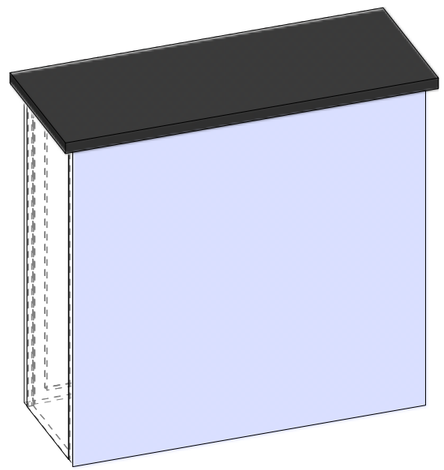



1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")
2100mm = (82 5/8")
1800mm = (70 7/8")
1500mm = (59")
1200mm = (47 1/4")
900mm = (35 1/2")
600mm = (23 5/8")
300mm = (11 7/8")

Phone Line / Fax
Internet connection
Outlet
Main Drop (point of distrution)
Wire running under carpet


PM2S2


PHFC4


PHFC2



PH


PH4SC

HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS

PACKING INSTRUCTIONS

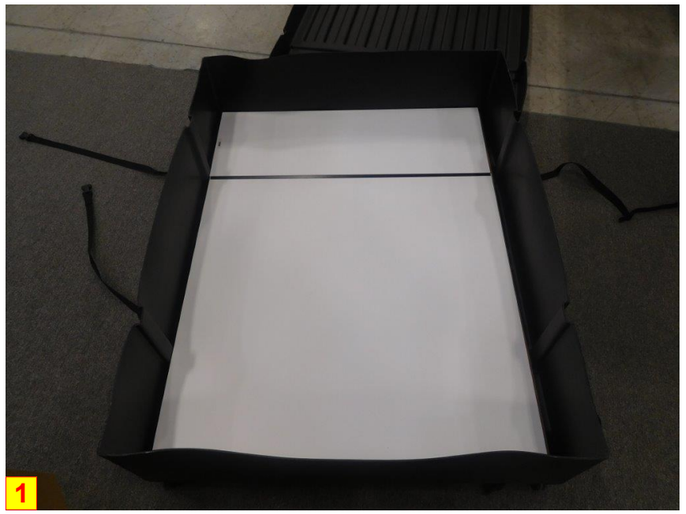

(1) R57, (1) R58



(1) R56, (1) R58



(1) SET KEY
(1) BOOKLET



(1) 33 GRAPHIC



CT-31L, (4) L90S-900

CASE # 1

LEGEND	
	GREY FOAM FOLDED TO FILL EMPTY SPACES OR USED AS PROTECTION
	1/8" CARDBOARD SPACER (PUT IN BETWEEN EVERY PANEL)
	DIVIDER
	1/4" WHITE FOAM (USED AS PROTECTION DOOR PANELS W/ LOCKS)

